

# Product data sheet

Specifications



APC Back-UPS Pro, 1350VA/  
810W, Tower, 120V, 10x NEMA  
5-15R outlets, Sine Wave, AVR,  
USB Type A + C ports, LCD, User  
Replaceable Battery

BR1350MS

Product availability: Non-Stock - Not normally stocked in  
distribution facility

## Overview

Lead time Usually in Stock

## Main

Main Input Voltage 120 V AC 1 phase

Input Connection Type NEMA 5-15P

Maximum Input Current per Phase 12 A

Switching current capacity 15 A

Plug standard NEMA  
5-15P

Efficiency at full load 88...147 V

Input Frequency 60 Hz +/- 3 Hz

Output voltage 120 V AC 1 phase

Rated power in W 810 W

rated power in VA 1350 VA

output connection type 6 NEMA 5-15R  
4 NEMA 5-15R surge

USB Charging Port USB type A + C

Maximum configurable power in  
VA 1350 VA

Max Configurable Power (Watts) 810 W

Transfer Time 8ms typical : 10 ms maximum

Topology Line Interactive

Waveform Type Sine wave

Output frequency 60 Hz +/- 3 Hz sync to mains

Replacement battery [APCRBC161](#)

## Graphs

Run Time [View Runtime Graph](#)

Efficiency [View Efficiency Graph](#)

## Complementary

Battery Size Lead-acid internal included

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Control panel</b>	Multi-function LCD status and control console
<b>UPS connectivity</b>	USB port
<b>Surge energy rating</b>	1080 J
<b>Filtering</b>	Full time multi-pole noise filtering :5% of IEEE surge let-through : zero clamping response time: in
<b>Cable length</b>	6 ft (1.8 m)
<b>Number of cables</b>	1
<b>Height</b>	10.2 in (260 mm)
<b>Width</b>	3.9 in (100 mm)
<b>Depth</b>	14.5 in (368 mm)
<b>Product Weight</b>	25.8 lb(US) (11.7 kg)
<b>Mounting preference</b>	No preference
<b>Mounting Mode</b>	Not rack-mountable
<b>Two post mountable</b>	0
<b>USB compatible</b>	Yes
<b>Mounting mode</b>	Tower
<b>Number of power module filled slots</b>	0
<b>Number of power module free slots</b>	0
<b>Additional specification</b>	Gaming performance
<b>Redundant</b>	No
<b>Range of Product</b>	Back-UPS Pro
<b>Product or Component Type</b>	Uninterruptible power supply (UPS)

## Environment

<b>Product Certifications</b>	ENERGY STAR V2.0 (USA) NOM TUV C-US certified
<b>Equipment protection policy</b>	Lifetime : \$500000
<b>Ambient Air Temperature for Operation</b>	32...104 °F (0...40 °C)
<b>Ambient Air Temperature for Storage</b>	5...104 °F (-15...40 °C)
<b>Storage altitude</b>	0...10000 ft (0...3048 m)
<b>Relative Humidity</b>	0...95 % non-condensing
<b>Storage Relative Humidity</b>	0...95 % non-condensing
<b>Acoustic level</b>	45 dBA
<b>Operating altitude</b>	0...10000 ft

## Batteries & Runtime

<b>Battery Type</b>	Lead-Acid battery
<b>Extendable Run Time</b>	0
<b>Included Battery Modules</b>	1
<b>Battery Slots Empty</b>	0
<b>Typical recharge time</b>	16 h

<b>RBC Quantity</b>	2
<b>Battery Life</b>	3...5 year(s)
<b>Battery Charge Power (Watts)</b>	10 W rated

## Ordering and shipping details

<b>Category</b>	11309-APC RESALE PRODUCTS
<b>Discount Schedule</b>	APC1
<b>GTIN</b>	00731304335399
<b>Returnability</b>	No
<b>Country of origin</b>	PH

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	14.12 in (35.87 cm)
<b>Package 1 Width</b>	19.0 in (48.2 cm)
<b>Package 1 Length</b>	8.8 in (22.3 cm)
<b>Package weight(Lbs)</b>	29.3 lb(US) (13.3 kg)
<b>SCC14</b>	10731304335396

## Contractual warranty

<b>Warranty (in months)</b>	36 UPS 12 Battery
-----------------------------	-------------------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

Total lifecycle Carbon footprint	474 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	127 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	343 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	1 kg CO2 eq.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>

## Use Better



### Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	019b51cf-d7f1-4f06-ac85-1378fc94c7aa
EU RoHS Directive	<a href="#">Compliant By Exemption</a>
REACH Regulation	<a href="#">Reference contains Substances of Very High Concern above the threshold</a>
California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>



### Energy efficiency

Optimized Energy Efficiency	Energy efficient product
ENERGY STAR®	ENERGY STAR UPS V2.0 (USA)

## Use Longer



### Lifetime extension

Repair	No
--------	----

## Use Again



### Repack and remanufacture

Recyclability potential, in %	62
Circularity Profile	<a href="#">End of Life Information</a>

Removable battery

User replaceable

---

Take-back

Yes

---

Technical Illustration

Dimensions

---




Offer Marketing Illustration

Product benefits / Features

---

### Complete power protection for every day

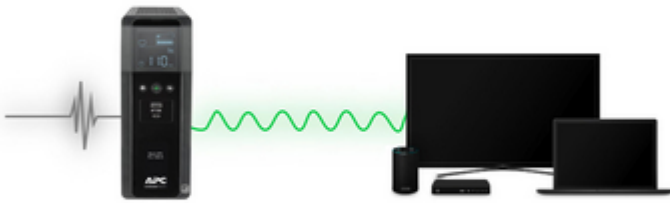


APC Back-UPS automatically corrects voltage levels to deliver **clean, consistent power, 24/7** so your devices **perform better, last longer and stay connected** during power outages.

Offer Marketing Illustration

Product benefits / Features


---

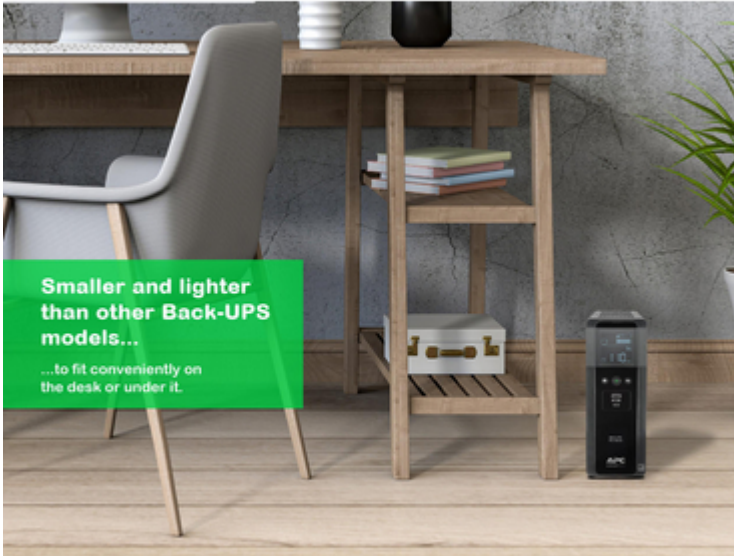

Offer Marketing Illustration

Product benefits / Features

---



1350VA / 810W Battery Backup



Audible Alarms with Quick Mute



USB Charging Ports




User Replaceable Battery

Offer Marketing Illustration

Product benefits / Features

---


### Communication ports and outlets

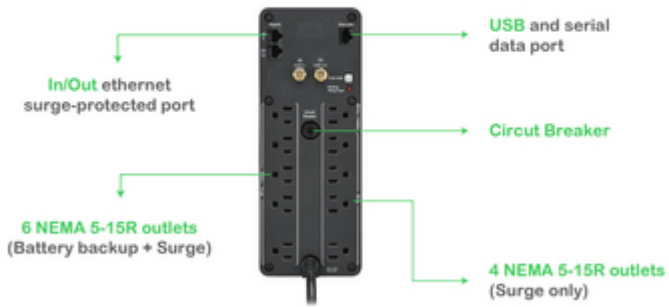

Offer Marketing Illustration

Product benefits / Features

---

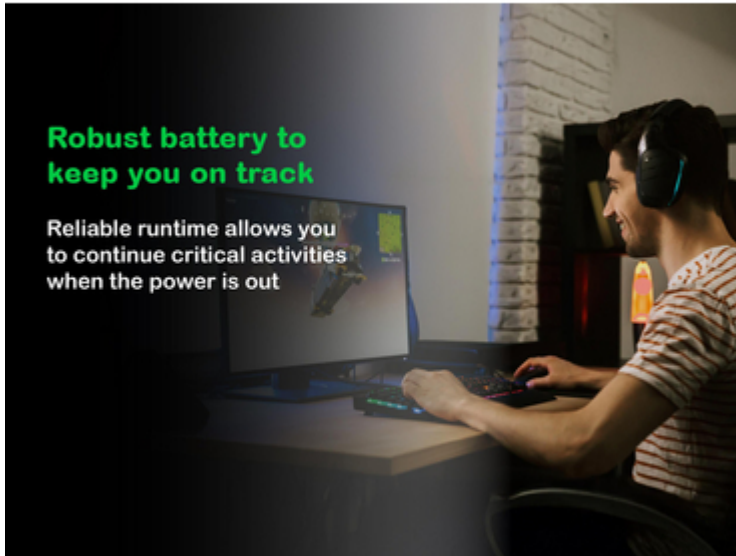

Offer Marketing Illustration

Product benefits / Features

---

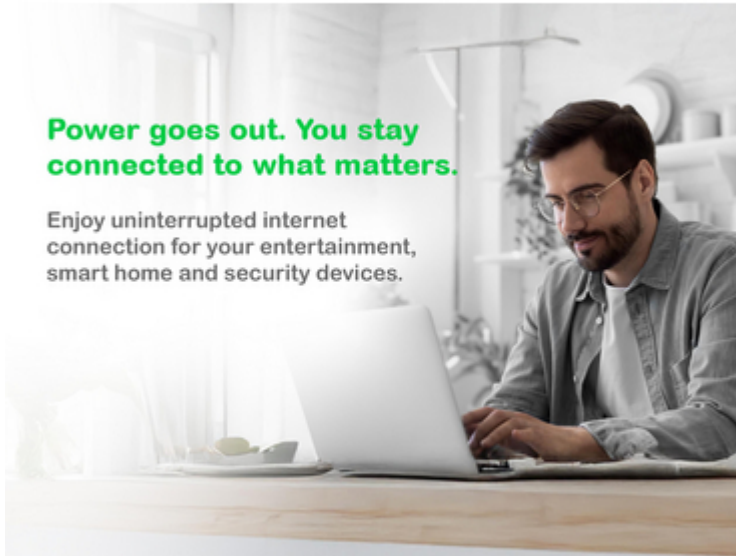


Image of product / Alternate images

Alternative

---

