

Product data sheet

Specifications



APC Smart-UPS X, Line Interactive, 3kVA, Rack/tower convertible 2U, 100V-127V, 3x 5-15R+3x 5-20R+1x L5-30R NEMA, NMC, Extended runtime, W/rail kit

SMX3000RMLV2UNC

Product availability: Non-Stock - Not normally stocked in distribution facility

Overview

Presentation	Intelligent and efficient network power protection from entry level to scalable runtime. Ideal UPS for servers, point-of-sale, routers, switches, hubs and other network devices.
Lead time	Usually Ships within 2 Weeks


Main

Main Input Voltage	120 V AC
Other Input Voltages	100 V 110 V 127 V
Input Connection Type	NEMA L5-30P
Efficiency at full load	70...153 V
Input Frequency	50/60 Hz +/- 3 Hz auto-sensing
Output voltage	120 V AC 1 phase
Other Output Voltages	100 V 110 V 127 V
Rated power in W	2700 W
rated power in VA	2880 VA
output connection type	3 NEMA 5-15R 3 NEMA 5-20R 1 NEMA L5-30R
Harmonic distortion	Less than 5%
Maximum configurable power in VA	2880 VA
Max Configurable Power (Watts)	2700 W
Maximum output current	15 A
Transfer Time	2-4 ms 4ms typical : 8ms maximum
Topology	Line Interactive
Waveform Type	Sine wave
Output frequency	50/60 Hz +/- 3 Hz sync to mains
Replacement battery	APCRBC117

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Graphs

Run Time [View Runtime Graph](#) 

Efficiency [View Efficiency Graph](#) 

Complementary

Battery Size	Lead-acid internal included
Control panel	Multi-function LCD status and control console
Emergency Power Off (EPO)	Yes
Free slots	0
Pre-Installed SmartSlot Cards	Network management card 3 with environmental monitoring
Control panel	LED status display with on line : on battery : replace battery and overload indicators
Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays
UPS connectivity	Serial port USB port Pre-installed network management card 3
Surge energy rating	540 J
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : m
Number of rack unit	2U
Cable length	8 ft (2.4 m)
Number of cables	1
color	Black
Height	3.3 in (85 mm)
Width	17.008 in (432 mm)
Depth	26.3 in (667 mm)
Product Weight	84.77 lb(US) (38.45 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Two post mountable	0
USB compatible	Yes
Mounting mode	Rack-mounted with included kit
Provided equipment	CD with software Documentation CD Installation guide Rack mounting hardware Rack Mounting brackets Rack Mounting support rails Removable support feet Smart UPS signalling RS-232 cable USB cable Web/SNMP Management Card
Number of power module	0
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	Extended run

Redundant	No
Range of Product	Smart-UPS
Product or Component Type	Uninterruptible power supply (UPS)

Environment

Product Certifications	BSMI CSA NOM TÜV VCCI Class A
Equipment protection policy	Lifetime : \$150000
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	5...113 °F (-15...45 °C)
Storage altitude	0...50000 ft (0...15240 m)
Relative Humidity	0...95 %
Storage Relative Humidity	0...95 %
Acoustic level	55 dBA
Online Thermal Dissipation	276 Btu/h
Operating altitude	0...10000 ft

Batteries & Runtime

Battery Type	Lead-Acid battery
Extendable Run Time	1
Included Battery Modules	0
Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery Life	3...5 year(s)
Battery Charge Power (Watts)	245 W rated

Ordering and shipping details

Category	11309-APC RESALE PRODUCTS
Discount Schedule	APC1
GTIN	731304268543
Returnability	No
Country of origin	PH

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.6 in (24.3 cm)
Package 1 Width	34.2 in (86.9 cm)
Package 1 Length	23.5 in (59.6 cm)

Package weight(Lbs)	100.002 lb(US) (45.36 kg)
Pallet unit layers	2
Pallet layers	4

Contractual warranty

Warranty (in months)	24 Battery 36 UPS
----------------------	-------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	3 229 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 498 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	18 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 709 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Energy efficiency

Optimized Energy Efficiency	Energy efficient product
-----------------------------	--------------------------

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	58
Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes

WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features

**Power protection for your physical & virtual IT environment
with PowerChute[™] Network Shutdown Software**

Unattended, graceful shutdown, automated start-up and ease of use for:



Hyperconverged
infrastructure



Virtual
machines



Hosts and
cluster services



Offer Marketing Illustration

Product benefits / Features








Offer Marketing Illustration

Product benefits / Features

Network Management Card

Remotely monitor and manage your Smart-UPS with a pre-installed Network Management Card 3

-  Configuration and control options
-  Event and data logging
-  Enterprise management system compatible
-  Enables connection to EcoStruxure IT



The image shows a black Network Management Card 3 (AP9641) from Schneider Electric. It features a USB port, two Universal I/O ports, a Console port, and a Network port. The network port is highlighted with a green box. The card also has a Reset button and a status indicator light.

Offer Marketing Illustration

Product benefits / Features

**Peace of mind at home or office with
PowerChute™ Serial Shutdown Software**

UPS management, graceful shutdown, and
energy management software for:



Desktops



Servers



Workstations



Offer Marketing Illustration

Product benefits / Features

Overview

Advanced monitoring and management capabilities with numerous outlets to power and protect all your sensitive devices.



Network Management Card 3




3 NEMA 5-15R outlets (switched outlet group 1)



3 NEMA 5-20R outlets (switched outlet group 2)



1 NEMA L5-30R outlet (switched outlet group 3)

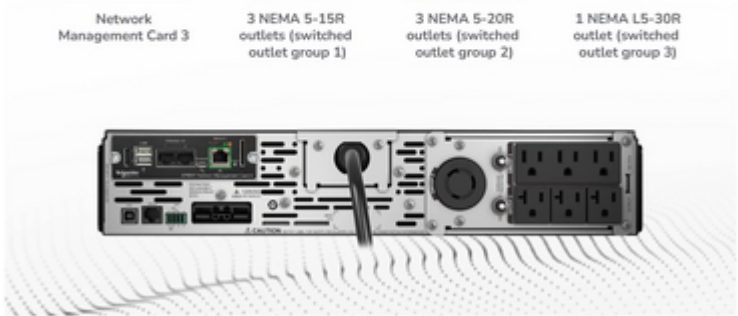

Offer Marketing Illustration

Product benefits / Features

Extended Runtime

Supports up to 10 external battery packs.

Estimated battery runtime at half load



Image of product / Alternate images

Alternative



