

Product data sheet

Specifications



APC Smart-UPS On-Line,
2200VA, Rackmount 2U, 120V, 6x
5-20R+1x L5-20R NEMA outlets,
Network Card, Extended runtime,
W/ rail kit

SRT2200RMXLA-NC

Overview

Lead time Usually in Stock

Main

Main Input Voltage 120 V AC 1 phase

Input Connection Type NEMA 5-20P

Input Frequency 40 - 70 Hz auto-sensing

Output voltage 120 V 1 phase

Rated power in W 1800 W

rated power in VA 2200 VA

output connection type 6 NEMA 5-20R
1 NEMA L5-20R

Bypass type Built-in Bypass

Crest factor 3 : 1

Harmonic distortion Less than 2%

Maximum configurable power in VA 2200 VA

Max Configurable Power (Watts) 1800 W

Topology On-Line

Waveform Type Sine wave

Output frequency 50/60 Hz +/- 3 Hz sync to mains

Replacement battery [APCRBC141](#)

Graphs

Run Time [View Runtime Graph](#)

Efficiency [View Efficiency Graph](#)

Complementary

Battery Size Lead-acid internal included

Emergency Power Off (EPO) Yes

Free slots 0

Pre-Installed SmartSlot Cards Network management card 3 with environmental monitoring

Alarm Audible and visible alarms : prioritized by severity

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

UPS connectivity	Serial port USB port Pre-installed network management card 3
Surge energy rating	340 J
Number of rack unit	2U
Cable length	5.9 ft (1.8 m)
Number of cables	1
color	Black
Height	3.3 in (85 mm)
Width	17.008 in (432 mm)
Depth	23.0 in (584 mm)
Product Weight	55.1 lb(US) (25 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Two post mountable	0
USB compatible	Yes
Mounting position	Horizontal
Mounting mode	Rack-mounted with kit sold separately
Provided equipment	CD with software Documentation CD Installation guide Network Management Card Rack mounting hardware Rack Mounting brackets Rack Mounting support rails USB cable Warranty card
Number of power module	1400
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	High density
Redundant	No
Range of Product	Smart-UPS On-Line
Product or Component Type	Uninterruptible power supply (UPS)

Environment

Product Certifications	ENERGY STAR V2.0 (USA)
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	-4...122 °F (-20...50 °C)
Storage altitude	0...50000 ft (0...15240 m)
IP degree of protection	IP20
Relative Humidity	0...95 % non-condensing
Storage Relative Humidity	0...95 % non-condensing
Acoustic level	55 dBA

Online Thermal Dissipation	535 Btu/h
----------------------------	-----------

Operating altitude	0...10000 ft
--------------------	--------------

Batteries & Runtime

Battery Type	Lead-Acid battery
--------------	-------------------

Battery Voltage	72V
-----------------	-----

Extendable Run Time	1
---------------------	---

Included Battery Modules	1
--------------------------	---

Battery Slots Empty	0
---------------------	---

Typical recharge time	3 h
-----------------------	-----

RBC Quantity	1
--------------	---

Battery Life	3...5 year(s)
--------------	---------------

Battery Charge Power (Watts)	102 W rated
------------------------------	-------------

Ordering and shipping details

GTIN	731304325154
------	--------------

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	9.7 in (24.6 cm)
------------------	------------------

Package 1 Width	31.9 in (81 cm)
-----------------	-----------------

Package 1 Length	23.6 in (59.9 cm)
------------------	-------------------

Package weight(Lbs)	75.001 lb(US) (34.02 kg)
---------------------	--------------------------

Contractual warranty

Warranty (in months)	24 Battery 36 UPS
----------------------	-------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	5 956 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	399 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	4 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	5 549 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	4282bd22-a353-4f82-bb5c-97bbd7f1d1e9
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Energy efficiency



ENERGY STAR®

ENERGY STAR UPS V2.0 (USA)

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	65
Circularity Profile	End of Life Information
Removable battery	User replaceable

Take-back

Yes

WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Intelligent battery management



Battery replacement recommendations



Temperature-compensated charging



Periodic battery self-test



Disconnect battery notifications



Offer Marketing Illustration

Product benefits / Features

Installation Flexibility

The SRT series is rack/tower convertible to support evolving business needs.



Offer Marketing Illustration

Product benefits / Features

Power protection for your physical & virtual IT environment with PowerChute™ Network Shutdown Software

Unattended, graceful shutdown, automated start-up and ease of use for:



Hyperconverged infrastructure



Virtual machines



Hosts and cluster services



Offer Marketing Illustration

Product benefits / Features

Keep your critical applications running
when you need them the most



Offer Marketing Illustration

Product benefits / Features

Network Management Card

Remotely monitor and manage your Smart-UPS with a pre-installed Network Management Card 3



Configuration and control options



Event and data logging



Enterprise management system compatible



Enables connection to EcoStruxure IT



Offer Marketing Illustration

Product benefits / Features

Intuitive LCD interface

Real-time status updates with multiple language options, and intuitive navigation keys.



Offer Marketing Illustration

Product benefits / Features

SmartConnect Ethernet Port

Out-of-box cloud-based remote power monitoring

-  UPS firmware upgrades
-  Remote diagnostics
-  Proactive email notifications
-  Recommended actions



Select features may be subject to Ser-based licensing. Terms on the Smart-UPS Web Portal.

Offer Marketing Illustration

Product benefits / Features

Peace of mind at home or office with PowerChute™ Serial Shutdown Software

UPS management, graceful shutdown, and energy management software for:



Desktops



Servers



Workstations



Offer Marketing Illustration

Product benefits / Features

Premium Power Protection

Maintain business operations, customer satisfaction, and revenue by mitigating power and voltage disruptions.



2200VA/18000W
Battery backup



Pure Sine Wave
Power



Double-conversion
on-line power
protection



92.2%
Online efficiency



Offer Marketing Illustration

Product benefits / Features

Live Swappable Batteries

Ensure clean, uninterrupted power to protected equipment while batteries are being replaced.



Offer Marketing Illustration

Product benefits / Features

Extended Runtime

Supports up to 10 external battery packs.

Estimated battery runtime at half load



0 External batteries



10 External batteries



Offer Marketing Illustration

Product benefits / Features



Peace of Mind
Ensure that your equipment remains powered, protected and available in any scenario.

3-year
Warranty on UPS

2-year
Warranty on battery

Offer Marketing Illustration

Product benefits / Features

Communication Ports and Outlets

Advanced monitoring and management capabilities with numerous outlets to power and protect all your sensitive devices.

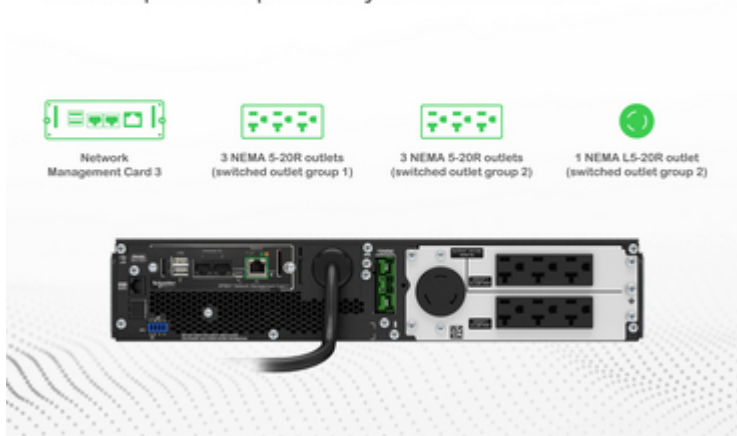


Image of product / Alternate images

Alternative

