

FortiCamera™ Series

Network Cameras Built for High-performance Video Surveillance



Highlights

- Scheduled and manual recording
- Motion detection and continuous recordings
- Snapshot notifications and alerts
- Camera live view and video playback
- Event monitor with timeline
- Centralized management, maintenance, and monitoring
- Mobile access on iOS and Android

Smart Security Cameras for Any Business

Get complete visual coverage inside and out with FortiCameras. With options for indoor and outdoor, vandal-proof, weatherproof, low-light night vision, fixed and motorized zoom lenses, and two-way audio, there's a FortiCamera for every environment.

FortiCameras are easy to set up and can work with FortiRecorder appliance, VM, or with the FortiCamera Cloud solution. Full access to video feeds and alerts through web-based and mobile applications.

The AI powered FortiCameras provided even more reassurance, with face recognition or vehicle detection, you can be alerted of people of interest or vehicles allowing quick response to any situation that may arise.

FortiRecorder Cameras

Cameras designed for the on premise FortiRecorder solution.



FortiCamera CD51

Fixed dome camera designed for indoor or outdoor environments, easily mounted on walls or ceilings. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.



FortiCamera CD55

Fixed dome camera designed for indoor or outdoor environments with 4x optical zoom, easily mounted on walls or ceilings. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.



FortiCamera FB50H

Bullet-style camera with an adjustable angle and 4x optical zoom. Designed for indoor and outdoor environments in a compact format.



FortiCamera FD50

Fixed dome camera providing a clear image with a 4x optical zoom for indoor or outdoor environments. With a built-in microphone and strong low-light sensitivity through true shutter WDR make this camera work in almost any light situation.



FortiCamera FD51

Fixed dome camera with a fixed wide-angle lens designed for indoor or outdoor environments. The built in Digital IO integrates with motion sensors, alarms, and strong low-light sensitivity through true shutter WDR.



FortiCamera FE120B

Fisheye camera providing a 360-degree field of view within indoor or outdoor environments, giving you wide coverage with no blind spots.



FortiCamera MC51

Mini cube camera designed for indoor environments. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.

FortiRecorder Cameras

MODEL	CD51	CD55	FB50H	FD50	FD51	FE120B	MC51
							
Type	Fixed dome	Fixed dome	Bullet	Fixed dome	Fixed dome	Fisheye	Mini Cube
Installation	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor	Indoor
Sensor Resolution	5 MP	5 MP	5 MP	5 MP	5 MP	12 MP	5 MP
Zoom	—	4x Optical	4x Optical	4x Optical	—	—	—
View Angle	H: 95° V: 72° D: 118°	H: 29°~99° V: 22°~71° D: 35°~132°	H: 32°~111° V: 18°~57° D: 37°~136°	H: 30°~90° V: 23°~65° D: 38°~115°	H: 111° V: 59° D: 133°	Ceiling: 360° Wall: 180° Table: 360°	H: 102° V: 72° D: 132°
Audio	Built-in mic	Built-in mic	Line in/out	Built-in mic, line out	Line in/out	Built-in mic	Built-in mic and speaker
IR Illumination	20m+ (dimnable)	20m+ (dimnable)	30m	30m	30m	20m	8m+ (dimnable)
Rating	IP67 / IK10	IP67 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10	—

Cloud Enabled Cameras

Designed to work with FortiCamera Cloud solution, or locally with FortiRecorder providing local storage.



FortiCamera CD51-C

Fixed dome camera with included storage designed for indoor or outdoor environments, easily mounted on walls or ceilings. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.



FortiCamera CD55-C

Fixed dome camera with included storage designed for indoor or outdoor environments with 4x optical zoom, easily mounted on walls or ceilings. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.



FortiCamera MC51-C

Mini cube camera with included storage designed for indoor environments. Built-in Bluetooth and Wi-Fi allows for easy configuration, placement within hard-to-reach locations.

MODEL	CD51-C	CD55-C	MC51-C
			
Type	Fixed dome	Fixed dome	Mini Cube
Installation	Indoor / outdoor	Indoor / outdoor	Indoor
Sensor Resolution	5 MP	5 MP	5 MP
Zoom	—	4x Optical	—
View Angle	H: 95° V: 72° D 118°	H: 29°~99° V: 22°~71° D: 35°~132°	H: 102° V: 72° D: 132°
Audio	Built-in mic	Built-in mic	Built-in mic and speaker
IR Illumination	20m+ (dimmable)	20m+ (dimmable)	8m+ (dimmable)
Rating	IP67 / IK10	IP67 / IK10	—
Storage	512 GB	512 GB	512 GB

Cloud AI Enabled Cameras

AI cameras designed to work with FortiCamera Cloud solution..



FortiCamera FD55-CA

Fixed dome camera with built-in AI for face, people or vehicle recognition. Designed for indoor or outdoor environments with 5x optical zoom, easily mounted on walls or ceilings.



FortiCamera FB85-CA

Bullet-style camera with built-in AI for face, people, vehicle or licence plate detection. Designed for indoor and outdoor environments with an adjustable angle and 4x optical zoom, a sunshield and hidden LEDs.



FortiCamera FE120B-CA

Fisheye camera with built-in AI for people and vehicle search providing a 360-degree field of view. Designed for indoor or outdoor environments, giving you wide coverage with no blind spots.

MODEL	FB85-CA	FD55-CA	FE120B-CA
			
Type	Full Bullet	Fixed dome	Fisheye
Installation	Indoor / outdoor	Indoor / outdoor	Indoor / outdoor
Sensor Resolution	8 MP	5 MP	12 MP
Zoom	4x Optical	5x Optical	—
View Angle	H: 35°~166° V: 20°~60° D: 41°~145°	H: 28°~96° V: 21°~70° D: 35°~127°	Ceiling: 360° Wall: 180° Table: 360°
Audio	Line in/out	Line in/out	Built-in mic
IR Illumination	50m	50m	20m
Rating	IP66 / IP67 / IK10	IP66 / IP67 / IK10	IP66 / IK10
Storage	1 TB	512 GB	1 TB
Analytics			
People	✓	✓	✓
Vehicle	✓	✓	✓
Attributes	✓	✓	✓
Face	✓	✓	—
License plate	✓	—	—

FortiRecorder Cameras Technical Specifications

MODEL	FE120B	FD50	FD51	FB50H	CD51	CD55	MC51
							
Platform	FortiRecorder	FortiRecorder	FortiRecorder	FortiRecorder	FortiRecorder	FortiRecorder	FortiRecorder
Format	Fisheye	Fixed dome	Fixed dome	Bullet	Fixed dome	Fixed dome	Mini Cube
Installation	Indoor/Outdoor	Indoor/Outdoor	Indoor/Outdoor	Indoor / outdoor	Indoor/Outdoor	Indoor/Outdoor	Indoor
Sensor Resolution	12 MP	5 MP	5 MP	5 MP	5 MP	5 MP	5 MP
Image Sensor	1/2.3 inch progressive CMOS	1/2.7 inch low light CMOS	1/2.7 inch Progressive CMOS	1/2.7 inch low light CMOS	1/2.8 inch low light CMOS	1/2.8 inch low light CMOS	1/2.8 inch low light CMOS
Iris	Fixed	Fixed	Fixed	Fixed	Fixed	DC-Iris	Fixed
Aperture	F2.0	F1.4 (W), F2.8 (T)	F1.6	F1.6 (W), F3.1 (T)	F2.0	F1.6 (W), F3.3 (T)	F2.0
Zoom	—	4x Optical	—	4x	—	4x Optical	—
Focal Length	1.22 mm	2.8–12 mm	2.8 mm	2.7–13 mm	2.8 mm	2.7–13 mm	3.16 mm
View Angle	Ceiling mount: 360° Wall mount: 180° Table mount: 360°	Horizontal: 30°~90° Vertical: 23°~65° Diagonal: 38°~115°	Horizontal: 111° Vertical: 59° Diagonal: 133°	Horizontal: 32°~111° Vertical: 18°~57° Diagonal: 37°~136°	Horizontal: 95° Vertical: 72° Diagonal: 118°	Horizontal: 29°~99° Vertical: 22°~71° Diagonal: 35°~132°	Horizontal: 102° Vertical: 72° Diagonal: 132°
Minimum Illumination	0.1 Lux @ F1.4 (color) 0.005 Lux @ F2.0 (B/W)	0.035 Lux @ F1.4 (color) 0.005 Lux @ F1.4 (B/W)	0.055 Lux (color) @ F1.6 0.005 Lux (B/W) @ F1.6	0.025 Lux @ F1.6 (color)	0.05 Lux @ F2 (color) 0.01 Lux @ F2 (B/W)	0.03 Lux @ F1.6 (color) 0.01 Lux @ F1.6 (B/W)	0.05 Lux @ F2 (color) 0.01 Lux @ F2 (B/W)
Dynamic Range	Shutter WDR (>120dB)	Shutter WDR (>120dB)	Shutter WDR (>120dB)	DOL HDR (>120dB)	HDR (>80dB)	HDR (>80dB)	HDR (>80dB)
RTSP	☑	☑	☑	☑	☑	☑	☑
Video Compression	MJPEG/H.264/H.265	MJPEG/H.264/H.265	H.264/H.265	MJPEG/H.264/H.265	H.264/H.265	H.264/H.265	H.264/H.265
Audio	Built-in mic	Built-in mic, line out	Line in / out	Line in / out	Built-in mic	Built-in mic	Built-in mic and speaker
Ethernet port	10/100	10/100	10/100	10/100	10/100	10/100	10/100
Digital Input / output	1/1	—	1/1	1/1	—	—	—
Storage							
Operation							
IR Illumination	20m	30m	30m	30m	20m+ (dimnable)	20m+ (dimnable)	8m+ (dimnable)
3D Noise Reduction	☑	☑	☑	☑	☑	☑	☑
Dimensions							
Height x Width x Length (inches)	215 × 85 × 85	4.08 × 5.3 × 5.3	3.5 × 4.6 × 4.6	3.3 × 3.3 × 7.7	3.8 × 4.7 × 4.7	3.8 × 4.7 × 4.7	5.5 × 4.2 × 4.2
Height x Width x Length (mm)	68 × 150 × 150	104 × 133 × 133	90 × 117 × 117	85 × 85 × 195	97 × 120 × 120	97 × 120 × 120	138 × 91 × 91
Weight	1.55 lbs (701 g)	1.80 lbs (819 g)	1.24 lbs (562 g)	1.67 lbs (757 g)	1.09 lbs (498 g)	1.09 lbs (498 g)	138 × 91 × 91
Environment							
Power Over Ethernet	802.3at - Class 4	802.3af - Class 0	802.3af - Class 0	802.3af - Class 0	802.3af - Class 3	802.3af - Class 3	802.3af - Class 3
External Power			DC12V	DC12V			
Power Consumption (Max)	12.95W	12.95W	6.38W	7.77W	12.95W	12.95W max	< 10W
Operating Temperature	-4°F to 122°F (-20°C to 50°C)	14°F to 144°F (-10°C to 60°C)	-22°F to 144°F (-30°C to 60°C)	-22°F - 140°F (-30°C - 60°C)	-40°F to 122°F (-40°C to 50°C)	-40°F to 122°F (-40°C to 50°C)	14°F to 104°F (-10°C to 40°C)
Humidity	<90% non-condensing	<90% non-condensing	<90% non-condensing	<90% non-condensing	5% to 90% non-condensing	5% to 90% non-condensing	5% to 90% non-condensing



FortiRecorder Cameras Technical Specifications

MODEL	FE120B	FD50	FD51	FB50H	CD51	CD55	MC51
							
Compliance							
Regulatory and Standards	FCC Class A / CE	FCC Class A / ICES / CE	FCC Class A / ICES / CE	FCC Class A / CE	FCC Class B / ICES / CE / CB	FCC Class B / ICES / CE / CB	FCC Class B / ICES / CE / CB
Rating	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP66 / IK10	IP67 / IK10	IP67 / IK10	—
ONVIF Profiles	S, G, T	S, G	S, G, T	S, G, T	S, G, T	S, G, T	S, G, T
Wi-Fi/Bluetooth							
Bluetooth	—	—	—	—	BLE v5.0	BLE v5.0	BLE v5.0
Wi-Fi	—	—	—	—	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac
Mounting							
Wall	✓	✓	✓	✓	✓	✓	✓
Pole	✓	✓	✓	—	—	—	—
Ceiling	✓	✓	✓	✓	✓	✓	✓
3/4 inch conduit	—	✓	✓	—	✓	✓	—
Junction box	✓	—	✓	✓	✓	✓	—
Table	—	—	—	—	—	—	✓
Drop tube	✓	✓	✓	—	✓	✓	—
3-axis	—	✓	✓	✓	✓	✓	—
Tile	—	—	—	—	✓	✓	—

Cloud Enabled Cameras Technical Specifications

MODEL	CD51-C	CD55-C	MC51-C
			
Platform	FortiCamera Cloud and FortiRecorder	FortiCamera Cloud and FortiRecorder	FortiCamera Cloud and FortiRecorder
Format	Fixed dome	Fixed dome	Mini Cube
Installation	Indoor / outdoor	Indoor / outdoor	Indoor
Sensor Resolution	5 MP	5 MP	5 MP
Image Sensor	1/2.8 inch low light CMOS	1/2.8 inch low light CMOS	1/2.8 inch low light CMOS
Iris	Fixed	DC-Iris	Fixed
Aperture	F2.0	F1.6 (W), F3.3 (T)	F2.0
Zoom	—	4x Optical	—
Focal Length	2.8 mm	2.7–13 mm	3.16 mm
View Angle	Horizontal: 95° Vertical: 72° Diagonal: 118°	Horizontal: 29°~99° Vertical: 22°~71° Diagonal: 35°~132°	Horizontal: 29°~99° Vertical: 22°~71° Diagonal: 35°~132°
Minimum Illumination	0.05 Lux @ F2 (color) 0.01 Lux @ F2 (B/W)	0.03 Lux @ F1.6 (color) 0.01 Lux @ F1.6 (B/W)	0.05 Lux @ F2 (color) 0.01 Lux @ F2 (B/W)
Dynamic Range	HDR (>80dB)	HDR (>80dB)	HDR (>80dB)
RTSP	✓	✓	✓
Video Compression	H.264/H.265	H.264/H.265	H.264/H.265
Audio	Built-in mic	Built-in mic	Built-in mic and speaker
Ethernet port	10/100	10/100	10/100
Digital Input / output	—	—	—
Storage	512 GB	512 GB	512 GB
Operation	—	—	—
IR Illumination	20m+ (dimmable)	20m+ (dimmable)	8m+ (dimmable)
3D Noise Reduction	✓	✓	✓
Dimensions			
Height x Width x Length (inches)	3.8 × 4.7 × 4.7	3.8 × 4.7 × 4.7	5.5 × 4.2 × 4.2
Height x Width x Length (mm)	97 × 120 × 120	97 × 120 × 120	138 × 91 × 91
Weight	1.09 lbs (498 g)	1.09 lbs (498 g)	0.53 lbs (240 g)
Environment			
Power Over Ethernet	802.3af - Class 3	802.3af - Class 3	802.3af - Class 3
External Power	—	—	—
Power Consumption (Max)	12.95W	12.95W max	< 10W
Operating Temperature	-40°F to 122°F (-40°C to 50°C)	-40°F to 122°F (-40°C to 50°C)	14°F to 104°F (-10°C to 40°C)
Humidity	5% to 90% non-condensing	5% to 90% non-condensing	5% to 90% non-condensing
Compliance			
Regulatory and Standards	FCC Class B / ICES / CE / CB	FCC Class B / ICES / CE / CB	FCC Class B / ICES / CE / CB
Rating	IP67 / IK10	IP67 / IK10	—
ONVIF Profiles	S, G, T	S, G, T	S, G, T
Wi-Fi/Bluetooth			
Bluetooth	BLE v5.0	BLE v5.0	BLE v5.0
Wi-Fi	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac	2.4GHz, 802.11 b/g/n/ac 5GHz, 802.11 a/n/ac



Cloud Enabled Cameras Technical Specifications

MODEL	CD51-C	CD55-C	MC51-C
			
Mounting			
Wall	✓	✓	✓
Pole	—	—	—
Ceiling	✓	✓	✓
3/4 inch conduit	✓	✓	—
Junction box	✓	✓	—
Table	—	—	✓
Drop tube	✓	✓	—
3-axis	✓	✓	—
Tile	✓	✓	—

Cloud AI Enabled Cameras Technical Specifications

MODEL	FB85-CA	FD55-CA	FE120B-CA
			
Platform	FortiCamera Cloud	FortiCamera Cloud	FortiCamera Cloud
Format	Full Bullet	Fixed dome	Fisheye
Installation	Indoor / outdoor	Indoor / outdoor	Indoor/Outdoor
Sensor Resolution	8 MP	5 MP	12 MP
Image Sensor	1/2.8" low light CMOS	1/2.7 inch low light CMOS	1/2.3 inch progressive CMOS
Iris	P-iris	P-iris	Fixed
Aperture	F1.6 (W), F2.9 (T)	F1.6 (W), F3.3 (T)	F2.0
Zoom	4x Optical	5x Optical	—
Focal Length	2.8–12 mm	2.7–13.5 mm	1.22 mm
View Angle	Horizontal: 35°~166° Vertical: 20°~60° Diagonal: 41°~145°	Horizontal: 28°~96° Vertical: 21°~70° Diagonal: 35°~127°	Ceiling mount: 360° Wall mount: 180° Table mount: 360°
Minimum Illumination	0.085 lux @ F1.6 (Color) <0.005 lux @ F1.6 (B/W)	0.06 lux @ F1.6 (color) <0.005 lux @ F1.6 (B/W)	0.1 Lux @ F1.4 (color) 0.005 Lux @ F2.0 (B/W)
Dynamic Range	DOL WDR (>120dB)	Shutter WDR (>90dB)	Shutter WDR (>120dB)
RTSP	☑	☑	☑
Video Compression	MJPEG/H.264/H.265	H.264/H.265	MJPEG/H.264/H.265
Audio	Line in / out	Line in / out	Built-in mic
Ethernet port	10/100	10/100	10/100
Digital Input / output	2 / 2	2 / 1	1/1
Storage	1 TB	512 GB	1 TB
Operation	—	—	—
IR Illumination	50m	50m	20m
3D Noise Reduction	☑	☑	☑
Dimensions			
Height x Width x Length (inches)	4.65 × 4.65 × 11.57	4.05 × 6.1 × 6.1	215 × 85 × 85
Height x Width x Length (mm)	118 × 118 × 294	103 × 155 × 155	68 × 150 × 150
Weight	3.01 lbs (1365 g)	2.17 lbs (986 g)	1.55 lbs (701 g)
Environment			
Power Over Ethernet	802.3at - Class 4	802.3at - Class 0	802.3at - Class 4
External Power	DC12V / 24 VAC	DC12V / 24 VAC	
Power Consumption (Max)	25.1W (25.9W DC12V)	22.5W	12.95W
Operating Temperature	-22°F to 131°F (-30°C to 55°C)	-22°F to 122°F (-30°C to 60°C)	-4°F to 122°F (-20°C to 50°C)
Humidity	<90% non-condensing	<90% non-condensing	<90% non-condensing



Cloud AI Enabled Cameras Technical Specifications

MODEL	FB85-CA	FD55-CA	FE120B-CA
			
Compliance			
Regulatory and Standards	FCC Class A / ICES / CE	FCC Class A / ICES-003 / CE / CB / RCM	FCC Class A / CE
Rating	IP66 / IP67 / IK10	IP66 / IP67 / IK10	IP66 / IK10
ONVIF Profiles	S, G, T	S, G, T	S, G, T
Wi-Fi/Bluetooth			
Bluetooth	—	—	—
Wi-Fi	—	—	—
Mounting			
Wall	✓	✓	✓
Pole	—	✓	✓
Ceiling	✓	✓	✓
3/4 inch conduit	—	✓	—
Junction box	✓	✓	✓
Table	—	—	—
Drop tube	—	✓	✓
3-axis	✓	✓	—
Tile	—	—	—

Ordering Information

Product	SKU	Description
FortiCam FE120B Camera	FCM-FE120B	12 mega-pixel panoramic IP camera, 20m IR LED, 1.22mm fixed lens, 1× 10/100/1000 port with 802.3at PoE, audio, vandal proof, indoor/outdoor use, rated IP66.
	FC-10-FE20B-247-02-DD	FortiCare Premium Support for FortiCam FE120B camera.
FortiCam FE120B Cloud camera	FCM-FE120B-CA	Cloud enabled AI Analytics 12 Megapixel panoramic IP Camera, 20m IR LED, 1.22mm fixed lens, 1× 10/100/1000 port with 802.3at PoE, Audio, Vandal proof, Indoor/Outdoor Use, Rated IP66, 1TB SD card.
FortiCam FD50 Camera	FCM-FD50	5 mega-pixel fixed dome IP camera, 30m IR LED, 2.8-12mm motorized lens, 1× 10/100 port with 802.3af PoE, audio, shutter WDR, vandal proof, indoor/outdoor use, rated IP66.
	FC-10-FCFDS-247-02-DD	FortiCare Premium Support for FortiCam FD50 camera.
FortiCam FD51 Camera	FCM-FD51	FortiCam FD51 Camera FCM-FD51 5 mega-pixel fixed dome IP camera, 30m IR LED, 2.8mm fixed lens, 1× 10/100 port with 802.3af PoE, audio, HDR, DIO, vandal proof, indoor/outdoor use, rated IP66.
	FC-10-CF51A-247-02-DD	FortiCare Premium Support for FortiCam FD51 camera.
FortiCam FB50H Camera	FCM-FB50H	5 Megapixel Bullet IP Camera, 30m IR LED, 2.7 - 13.5mm motorized lens, 1× 10/100 port with 802.3af PoE, Audio, HDR, DIO, Vandal proof, Indoor/Outdoor Use, rated IP66.
	FC-10-MB55H-247-02-DD	FortiCare Premium support for FortiCam FB50H camera.
FortiCam CD51 Camera	FCM-CD51	5 mega-pixel fixed dome IP camera, 20m IR LED, 2.8mm fixed lens, 1× 10/100 port with 802.3af PoE, audio, HDR, Wi-Fi, BLE, vandal proof, indoor/outdoor use, rated IP67.
	FC-10-FCD51-247-02-DD	FortiCare Premium Support for FortiCam CD51 camera.
FortiCam CD51 Cloud Camera	FCM-CD51-C	Cloud-enabled, 5 mega-pixel fixed dome IP camera, 20m IR LED, 2.8mm fixed lens, 1× 10/100 port with 802.3af PoE, audio, HDR, Wi-Fi, BLE, vandal proof, indoor/outdoor use, rated IP67, 512GB SD card.
FortiCam CD55 Camera	FCM-CD55	5 mega-pixel fixed dome IP camera, 20m IR LED, 2.7-13mm motorized lens, 1× 10/100 port with 802.3af PoE, audio, HDR, Wi-Fi, BLE, vandal proof, indoor/outdoor use, rated IP67.
	FC-10-FCD55-247-02-DD	FortiCare Premium Support for FortiCam CD55 camera.
FortiCam CD55 Cloud Camera	FCM-CD55-C	Cloud-enabled, 5 mega-pixel fixed dome IP camera, 20m IR LED, 2.7-13mm motorized lens, 1× 10/100 port with 802.3af PoE, audio, HDR, Wi-Fi, BLE, vandal proof, indoor/outdoor use, rated IP67, 512GB SD card.
FortiCam MC51 Camera	FCM-MC51	5 Megapixel Mini Cube IP Camera, 8m IR LED, 3.16mm fixed lens, 1× 10/100 port with 802.3af PoE, Audio, HDR, Wi-Fi, BLE, Indoor Use.
	FC-10-CM51A-247-02-DD	FortiCare Premium Support for FortiCam MC51 camera.
FortiCam MC51 Cloud Camera	FCM-MC51-C	Cloud-enabled, 5 Megapixel Mini Cube IP Camera, 8m IR LED, 3.16mm fixed lens, 1× 10/100 port with 802.3af PoE, Audio, HDR, Wi-Fi, BLE, Indoor Use, 512GB SD card.
FortiCam FB85-CA Cloud Camera	FCM-FB85-CA	Cloud enabled AI analytics 8 Megapixel Bullet IP Camera, 50m IR LED, 3 - 9mm motorized lens, 1× 10/100 port with 802.3at PoE, Audio, Shutter WDR, DI/DO, Vandal proof, Indoor/Outdoor Use, Rated IP66/67, 1TB SD card.
FortiCam FD55-CA Cloud Camera	FCM-FD55-CA	Cloud enabled AI analytics 5 Megapixel Fixed Dome IP Camera, 50m IR LED, 2.7 - 13.5mm motorized lens, 1× 10/100 port with 802.3at PoE, Audio, Shutter WDR, DI/DO, Vandal proof, Indoor/Outdoor Use, Rated IP66/67, 512GB SD card.
Optional Accessories		
FortiCam FE120B Mount	FCM-FE120B-PCP-4	Pendant cap mount kit for FortiCam FE120B (set of 4).
FortiCam FD50 Mount	FCM-FD5-PCP-8	Pendant cap kit for FortiCam FD50 (for use with FCM-FD5-PDT) (set of 8).
FortiCam FD51 Mount	FCM-CD5-PCP-4	Pendant cap mount kit for FortiCam CD51, FD51 or CD55 (set of 4).
	FCM-CD5-WMT-8	Wall mount kit for FortiCam CD51, CD55, or FortiCam FD51 (set of 8).
FortiCam CD51/CD55 Mount	FCM-CD5-PCP-4	Pendant cap mount kit for FortiCam CD51, CD55 or FortiCam FD51 (set of 4).
	FCM-CD5-WMT-8	Wall mount kit for FortiCam CD51, CD55, or FortiCam FD51 (set of 8).
Junction Box Kit	FCM-FB5-JBX-4	Junction box kit for FortiCam FB85-CA, FB50H, or FortiCam FD50 (set of 4).
FortiCam Family Mount	FCM-FD5-PDT-8	Pendant arm kit (set of 8).
	FCM-MOUNT-STH-2	Ceiling mount kit (set of 2).
	FCM-MOUNT-POL-2	Pole mount kit (set of 2).
	FCM-MOUNT-ST20-4	Straight tube mount kit 20cm (set of 4).
FortiCam MC51 Power Adapter	SP-FCM12V1A-PA-1-US	12W/12VDC/1A AC/DC power adaptor with standard barrel 2.1mm pin DC connector and US plug for FCM-MC51 for North America and Japan.
	SP-FCM12V1A-PA-1-EU	12W/12VDC/1A AC/DC power adaptor with standard barrel 2.1mm pin DC connector and EU plug for FCM-MC51 for Europe.
FortiCam FD55-CA Mount	FCM-FD5-CD5-WMT-8	Wall Mount Kit for FCM-FD55-CA/FD50/CD51/CD55 (set of 8).
	FCM-FE120B-PCP-4	Pendant Cap Mount Kit For FCM-FE120B/FD55-CA (set of 4).
Free Applications*		
FortiCentral	DOWNLOAD	Video Management System for Windows.
FortiCamera iOS App	DOWNLOAD	Monitor FortiCameras from your iPhone or iPad.
FortiCamera Android App	DOWNLOAD	Monitor FortiCameras from your Android device.

*Free Downloads available at <https://www.fortinet.com/support/product-downloads>




FortiCare Support Service

FortiCare Support Services is per-device support services, and it provides customers access to over 1400 experts to ensure efficient and effective operations and maintenance of their Fortinet capabilities. Global technical support is offered 24x7 with flexible add-ons, including enhanced service level agreements (SLAs) and premium hardware replacement through 200+ in-country depots.

Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).

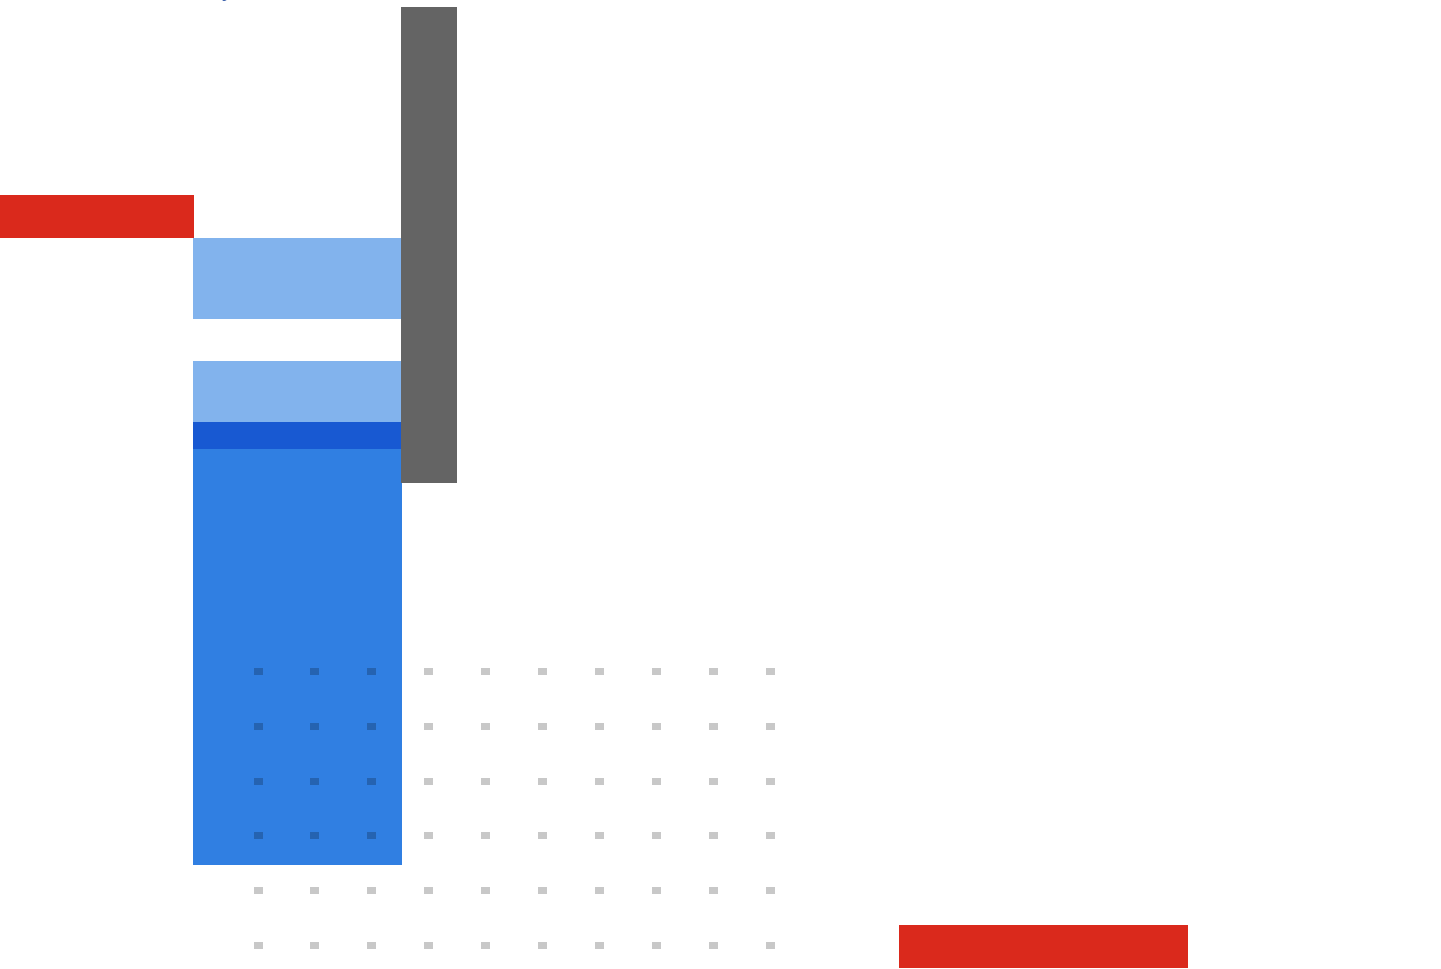

www.fortinet.com

Copyright © 2026 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's Chief Legal Officer, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.