

SAMSUNG



DM-D LARGE-SIZE COMMERCIAL LED LCD DISPLAYS

ENSURE MAXIMUM UPTIME



PUT A CLEAR AND COMPELLING MESSAGE FORWARD WITH 24/7 CONTINUOUS OPERATION

Samsung makes it easy to create a strong impression. The DM65D, DM75D and DMD82D commercial displays offer reliable 24/7 uptime and contain many features and benefits to effectively communicate in the busiest environments. With enhanced SoC (system-on-chip) performance and internal media player functionality, users can display content without the need of an external PC and can control messaging through either a RS232 or LAN connection. Samsung MagicInfo software simplifies content creation and programming. Each unit comes with a built-in quad-core processor to manage graphics-heavy content. Samsung's high-resolution HD graphics ensure messages are sharp and clear.

CONTACT US:

1-800-SAMSUNG | 1-866-SAM4BIZ

samsung.com/business

samsung.com/b2bdigitalsignage

FOLLOW US:

[youtube.com/samsungbizusa](https://www.youtube.com/samsungbizusa)

[@SamsungBizUSA](https://twitter.com/SamsungBizUSA)

KEY FEATURES



Large Signage with Reliable 24/7 Operation

Large-size displays feature innovative Samsung cooling technologies, for highly reliable 24/7 continuous operation. For added peace of mind, they come with a 3-year onsite commercial warranty.



Built-In Wi-Fi

In addition to HDMI, USB and D-Sub (analog) connectivity, the built-in Wi-Fi lets you easily share or mirror content from a tablet or other mobile device.



Enhanced System-on-Chip Performance with Quad-Core CPU

Powered by a System-on-Chip semiconductor and quad-core CPU, Samsung's Smart Signage Platform reduces TCO for digital signage deployments, providing savings in hardware, installation and operating costs.



Easy Content Control

The Samsung SMART Signage platform eliminates the need for an external media player. With Samsung MagicInfo™ content management software, selecting and scheduling software is simple to control with either a RS232 or LAN connection.



Super-Slim 2.3" Chassis

The stylishly thin chassis helps simplify installation while meeting ADA compliance requirements.



LED Technology

DM-D Series LED displays feature 1920 x 1080 Full HD resolution and up to 5000:1 contrast ratio for sharp, detail-rich images and crisp, easily legible type. LED gives you the advantage of large signage, with reduced power consumption and heat output.



Optional Touch Overlay (65" and 75" only)

Add an optional IR touch overlay accessory to enable up to 10 simultaneous touch points.



New Industrial Design

A sleek, stylish new look features our new hidden logo tag, for a clean, sophisticated installation.

Samsung DM-D Large-Size Commercial LED LCD Displays





KEY SPECIFICATIONS For complete product specifications, visit samsung.com/b2bdigitalsignage


Display	Model Number	DM65D	DM75D	DM82D	
	Screen Size	65"	75"	82"	
	Panel Technology	60Hz Slim D-LED BLU	60Hz Slim D-LED BLU	120Hz Edge-lit LED	
	Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)	1920 x 1080 (16:9)	
	Brightness	450 nits	450 nits	500 nits	
	Contrast Ratio	4000:1	5000:1	5000:1	
	Viewing Angle (Horizontal/Vertical)	178°/178°	178°/178°	178°/178°	
	Orientation	Landscape / Portrait	Landscape / Portrait	Landscape / Portrait	
	Response Time (G-to-G)	6.5ms	8ms	8ms	
Connectivity	Input	RGB	VGA (D-Sub 15 Pin), DW-D, DisplayPort 1.2	VGA (D-Sub 15 Pin), DW-D, DisplayPort 1.2	
		Video	HDMI, Component/Composite	HDMI (3), Component/Composite	
	Output	Audio	Stereo Mini Jack	Stereo Mini Jack	
		DisplayPort	DisplayPort 1.2 (Loop-out)	DisplayPort 1.2 (Loop-out)	
External Control	RS232C (In/Out) Thru Stereo Jack, RJ45	RS232C (In/Out) Thru Stereo Jack, RJ45	RS232C (In/Out) Thru Stereo Jack, RJ45		
Power	External Sensor	IR, Ambient Light	IR, Ambient Light	IR, Ambient Light	
	Power Supply	AC 100 - 240 V- (+/- 10 %), 50/60 Hz	AC 100 - 240 V- (+/- 10 %), 50/60 Hz	AC 100 - 240 V- (+/- 10 %), 50/60 Hz	
	Power Consumption (Typical/Max)	105W / 264W	147W / 308W	138W / 363W	
Environmental Conditions	Power Consumption (Standby)	< 0.5W	< 0.5W	< 0.5W	
	Operating Temperature	0°C~40°C	0°C~40°C	0°C~40°C	
Features	Humidity	10~80%	10~80%	10~80%	
		Special	Hardware	Slim & Light LFD with Built-in MagicInfo Player S2 Super Clear Coating, Temperature Sensor, Videowall (15 x 15), Pivot Display, Clock Battery (80 hrs Clock Keeping), Built in Speaker, WiFi Module Embedded, SD Card Slot	Slim & Light LFD with Built-in MagicInfo Player S2 Super Clear Coating, Temperature Sensor, Videowall (15 x 15), Pivot Display, Clock Battery (80 hrs Clock Keeping), Built in Speaker, WiFi Module Embedded, SD Card Slot
	Software	Hardware	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, PC-less Touch, MagicPresenter	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, PC-less Touch, MagicPresenter	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, MagicPresenter
		Software	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, PC-less Touch, MagicPresenter	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, PC-less Touch, MagicPresenter	Magic Clone (to USB), Auto Source Switching & Recovery, RS232C/RJ45 MDC, Plug and Play, PIP/PBP, Image Rotation, Button Lock, DP 1.2 Digital Daisy Chain (HDCP Support), Built In MagicInfo Player S2, Firmware Update by Network, LFD New Home Screen, PC-less VideoWall, Predefined Template for Vertical Usage, Multi Channel, Mobile Control, Event Schedule, Backup Player, MagicPresenter
	Tuner	Yes	Yes	Yes	
	SMART Signage Platform Compliant	Yes	Yes	Yes	
	Internal Media Player	Cortex-A9 1GHz Quad Core, 1.5GB DDR3, 4GB FDM, USB 2.0, Linux OS 400 x 400mm	Cortex-A9 1GHz Quad Core, 1.5GB DDR3, 4GB FDM, USB 2.0, Linux OS 400 x 400mm	Cortex-A9 1GHz Quad Core, 1.5GB DDR3, 4GB FDM, USB 2.0 (x2), Linux OS 600 x 400mm	
	VESA Standard Wall Mount Interface	400 x 400mm	400 x 400mm	600 x 400mm	
	24/7 Operation	Yes	Yes	Yes	
	Dimensions	Product Dimensions (without stand)	57.8" x 33.4" x 2.2"	66.0" x 37.8" x 2.3"	73.0" x 41.9" x 1.9" (3.5" depth incl. handles)
Packaging Dimensions		63.0" x 38.6" x 8.5"	71.3" x 42.7" x 9.8"	78.8" x 48.7" x 18.6"	
Weight	Product Weight	60.5 lbs.	75.4 lbs.	106.7 lbs.	
	Shipping Weight	89.1 lbs.	97.5 lbs.	136.4 lbs.	
Service	Standard Warranty	3 Years On-Site (Parts / Labor / Backlight)	3 Years On-Site (Parts / Labor / Backlight)	3 Years On-Site (Parts / Labor / Backlight)	
Accessories	Included	Quick Setup Guide, Warranty Card, D-Sub Cable, Power Cord, Remote Controller, Batteries, RS232C(IN) Adapter, COVER-JACK	Quick Setup Guide, Warranty Card, D-Sub Cable, Power Cord, Remote Controller, Batteries, RS232C(IN) Adapter, COVER-JACK	Quick Setup Guide, Regulatory Guide, Warranty Card, D-Sub Cable, Power Cord, Remote Controller, Batteries, RS232C(IN) Adapter, COVER-JACK	
	Optional Mount	WMN-4675MD	WMN-4675MD	WMN-5770D	
	Optional Stand	STN-L6500E	STN-L7585F	STN-L7585F	
	Optional Media Player	PIM-BF7, PIM-BF7P	PIM-BF7, PIM-BF7P	PIM-BF7, PIM-BF7P	
	Optional HDBase-T	PIM-HDBT	PIM-HDBT	PIM-HDBT	
	Optional Touch Overlay	CY-TE65LCC	CY-TD75LDAF	N/A	
Green Management	Emission Standard	EMC	EMC	EMC	
	RoHS Compliant	Yes	Yes	Yes	
	Packaging Recyclability	Packing Materials Recyclable	Packing Materials Recyclable	Packing Materials Recyclable	

CONNECTIVITY

DM65D / DM75D

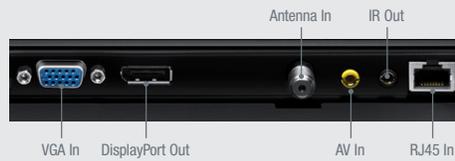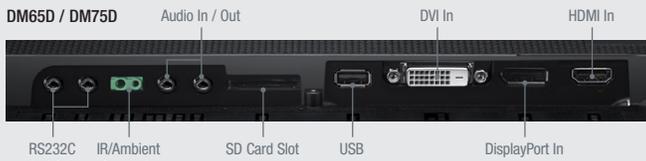

DM82D

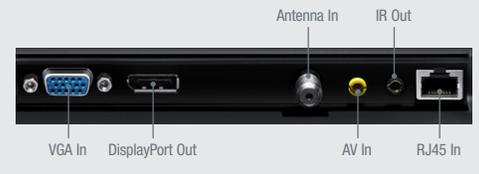

For complete product information and accessories, visit samsung.com/business or samsung.com/b2bdigitalsignage

Sales Support: 1-800-SAMSUNG or 1-866-SAM4BIZ | Follow Us: youtube.com/samsungbizusa | @SamsungBizUSA

Samsung Electronics has been named 2013 ENERGY STAR Partner of the Year in the product manufacturing category by the U.S. Environmental Protection Agency (EPA).



©2015 Samsung Electronics America, Inc. Samsung is a registered mark of Samsung Electronics Corp., Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All other brand, product, service names and logos are trademarks and/or registered trademarks of their respective manufacturers and companies. Simulated screen images. See samsung.com for detailed information. Printed in USA. LFD-DM657582DB2BDSHT-JAN15T