



ENS620EXT

11ac Wave 2 Outdoor Dual-Band Wireless Access Point

Extend your high-speed wireless coverage to the outdoors with the high-powered **ENS620EXT**, an 11ac Wave 2, MU-MIMO, Dual-Band Wireless AC1300 Outdoor Access Point. Reaching speeds to 867 Mbps on the 5 GHz and 400 Mbps on the 2.4 GHz frequency band, this feature-rich AP leverages advanced Wi-Fi and Beamforming antenna technology, maximizing performance and increasing outdoor or indoor network capacities. The AP is designed to operate in harsh environmental conditions and includes an IP55-rated weatherproof housing.

The ENS620EXT is easy to install in virtually any location with its included Power-over-Ethernet (PoE) injector for quick deployment regardless of its proximity to power outlets. The AP is an ideal wireless solution for indoor and outdoor residential and commercial applications.

Features

- > Wave 2 MU-MIMO Improves Performance & Expands User Capacities
- > IP55-Rated Waterproof & Dustproof Housing Withstands Harsh Environments
- > 11ac Dual-Radio Speeds to 867 Mbps on 5 GHz; to 400 Mbps on 2.4 GHz
- > Beamforming Optimizes Antenna Signal, Reception & Reliability
- > GigE PoE-Compatible Port for Easy Placement Where Power Outlets are Scarce
- > Four (4) External 5dbi High-Gain, 360° SMA-Type Antennas
- > Combine GigE Ports via Link Aggregation for Maximum AP Bandwidth Capacity
- > Band Steering Optimizes Network Traffic Flow ; Fast Roaming Secures Seamless Connections
- > Flexible Operation Modes: AP, Client Bridge or WDS
- > Quickly View, Monitor & Reconfigure APs Locally or Remotely with EZ Controller™ Software


Ideal for:

- > Restaurants & Cafes
- > Outdoor Living Areas
- > Retail Complexes
- > Resort Properties
- > Campgrounds & RV Parks
- > Marinas & Docks
- > Trucking & Transportation Centers
- > Golf Courses & Regional Parks
- > Ranches & Farms
- > Warehouse Facilities



Higher Speeds for Multi-User Support

The ENS620EXT offers the next generation of 11ac Wave 2 speed and performance for wireless access points by increasing speeds and capacities. Support the newest 11ac Wave 2 Multi-User MIMO (MU-MIMO) smartphones, laptops, and other mobile devices with AC1300 network speeds for bandwidth-heavy applications. Multi-MIMO sends multiple streams to several devices simultaneously expanding the total bandwidth and capacity of the network.

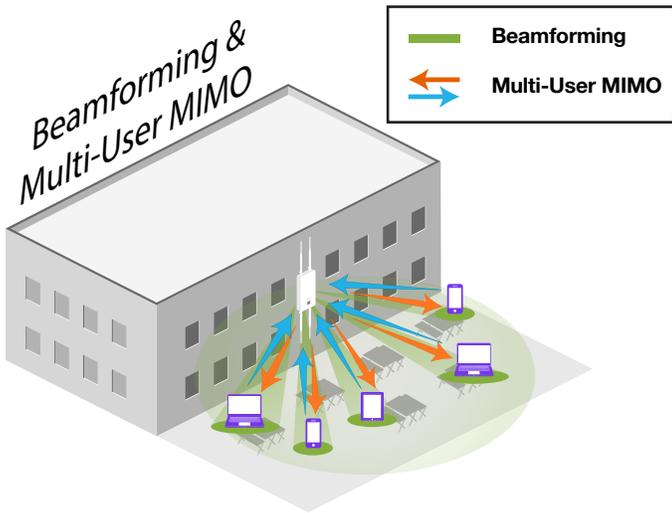


11ac Wave 2: Future Proof, Crowd Proof Networks

The ENS620EXT allows administrators to utilize the most advanced Wi-Fi technology standard available while supporting the future of mobile technology for their users. The AP handles crowded outdoor client environments through its two spatial, MU-MIMO streams and Beamforming technology, which targets signals directly to devices, providing optimal signal and reception reliability for users.

Powerful Connectivity Indoors and Out

The ENS620EXT is powerful enough to provide Wi-Fi connectivity approximately 3,000 square feet while its small footprint makes it flexible for both indoor and outdoor use. Place the AP near an exterior wall indoors and blanket both indoor and outdoor living areas with its wireless signal.

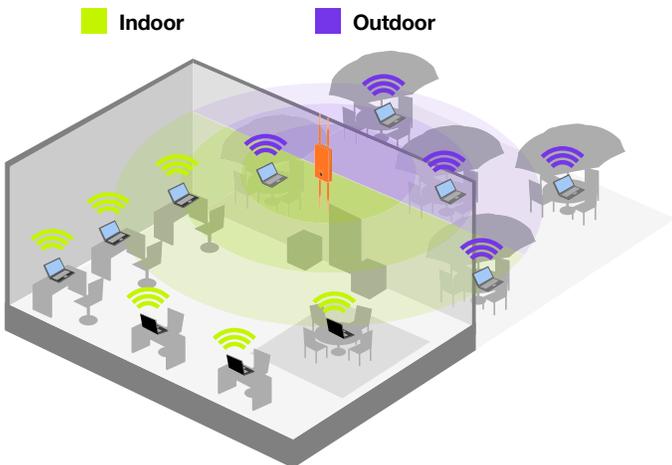

Exceptional Performance in Harsh Outdoor Climates


Designed for peak performance in harsh climates, the ENS620EXT features an IP55-rated weatherproof and dustproof enclosure ensuring it can withstand harsh outdoor and indoor environments where the temperature is a factor.



Fast Roaming & Secure Guest Network Features Improve the Customer Experience

Configure multiple APs for Fast Roaming (802.11r & 802.11k); ensuring client authentication occurs seamlessly before client devices move to the next AP, providing continuous connectivity for devices in motion with fast, secure roaming.

Establish Guest Networks to limit Internet resources for visitors while securing the network from sophisticated Trojans and malware that can use guest's mobile devices to attack the network.

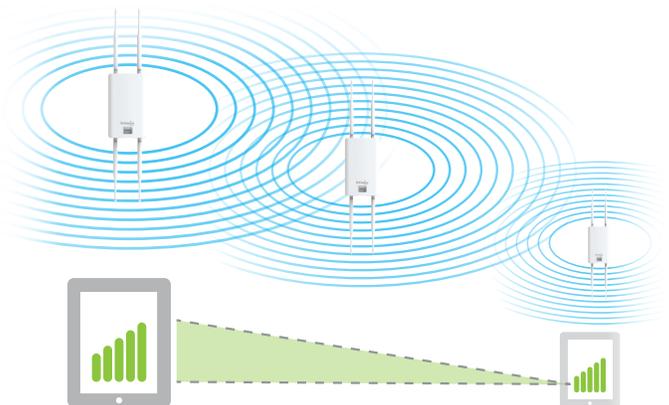

Product Specifications

Technical Specifications	Tx Beamforming (TxBF)	Traffic Shaping
Standards		Save Configuration as Default
IEEE 802.11b/g/n on 2.4 GHz	Radio Chains/Spatial Stream	Auto-Transmit Power
IEEE802.11a/n/ac on 5 GHz	2x2:2	Auto-Channel Selection
		Site Survey
Antenna	SU-MIMO	PMK Caching
Four (4) External 5 dBi Dual-Concurrent Omni-Directional Antennas	Two (2) Spatial Stream SU-MIMO up to 1267 Mbps to a single client	PMK Caching
SMA-Type		
	MU-MIMO	Distance Control (ACK Timeout)
Physical Interface	Two (2) Spatial Stream MU-MIMO up to 1267 Mbps to two (2) MU-MIMO capable wireless devices simultaneously	Multicast Supported
2 x 10/100/1000 Gigabit Ethernet Ports (Link Aggregation achieves 2 Gbps Throughput)		Fast Roaming (802.11k & 802.11r)
1 x Reset Button	Supported Data Rates (Mbps):	Email Alerts
	2.4 GHz: Max 400	Wi-Fi Scheduler
LED Indicators	5 GHz: Max 867	Client Traffic Status
1 x Power	802.11b: 1, 2, 5.5, 11	Guest Network
1 x LAN 1	802.11a/g: 6, 9, 12, 18, 36, 48, 54	RADIUS Accounting (802.1x)
1 x LAN 2	802.11n: 6.5 to 400 Mbps (MCS0 to MCS15)	Power Save Mode (U-APSD Support)
1 x 2.4 GHz	802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)	CLI Support
1 x 5 GHz		
Power Source	Supported Radio Technologies	SNMP
Power-over-Ethernet: Proprietary 24V PoE	802.11b: Direct-Sequence Spread Spectrum (DSSS)	v1, v2c, v3
IEEE 802.11e Compliant Source	802.11a/g/n/ac: Orthogonal Frequency-Division Multiplexing (OFDM)	MIB
Active Ethernet (PoE)	802.11n/ac: 2x2 MIMO with 2 Streams	I/II, Private MIB
		Wireless Security
Maximum Power Consumption	Channelization	WEP Encryption 64/128/152 bit
15W	802.11ac supports very high throughput (VHT)—VHT 20/40/80 MHz	WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)
Surge Protection	802.11n supports high throughput (HT)—HT 20/40 MHz	Hide SSID in Beacons
2KV	802.11n supports very high throughput (VHT) under the 2.4 GHz radio—VHT (256-QAM)	MAC Address Filtering, Up to 64 MACs per SSID
ESD Protection	802.11n/ac packet aggregation: AMPDU, ASPDU	Wireless STA (Client) Connected List
Contact: 4KV		Https
Air: 8 KV	Supported Modulation	SSH
	802.11b: BPSK, QPSK, CCK	Client Isolation
Wireless & Radio Specifications	802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM	
Operating Frequency	802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	Environment & Physical
Dual-Radio Concurrent 2.4 GHz & 5 GHz		Temperature Range
	Management	Operating: -4°~140°F/-20°C~60°C
Operation Modes	Multiple BSSID	Storage: -22°F~-176°F/-30°C~80°C
Access Point Mode (AP mode)	Supports 16 SSIDs (8 SSIDs per band)	
Client Bridge Mode (CB Mode)		Humidity (non-condensing)
WDS: WDS AP, WDS Bridge, WDS Station	VLAN Tagging	Operating: 90% or less
	Supports 802.1q SSID-to-VLAN Tagging	Storage: 90% or less
Frequency Radio	Cross-Band VLAN Pass-Through	
2.4 GHz: 2400 MHz ~ 2835 MHz	Management VLAN	Weatherproof
5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz		IP55-Rated Enclosure
	QoS (Quality of Service)	
Transmit Power	Complaint with IEEE 802.11e Standard	Dimensions & Weights
2.4 GHz: 27 dBm		ENS620EXT Device
5 GHz: 27 dBm	Band Steering	Weight: 1.11 lbs (504 g)
	RSSI Threshold	Width: 7.54" (191.6 mm)
		Length: 4.49" (114.3 mm)
		Height* 1.88" (47.7 mm)

Specifications continued

Package Contents

ENS620EXT Outdoor Access Point

Power Adapter (48V/0.8A)

PoE Adapter (EPA2410GP)

Pole Mounting Brackets

Wall-Mount Screw Set

RJ-45 Ethernet Cable

Quick Installation Guide


Certifications

FCC, CE




Warranty:

1 Year

ENS620EXT Outdoor Access Point

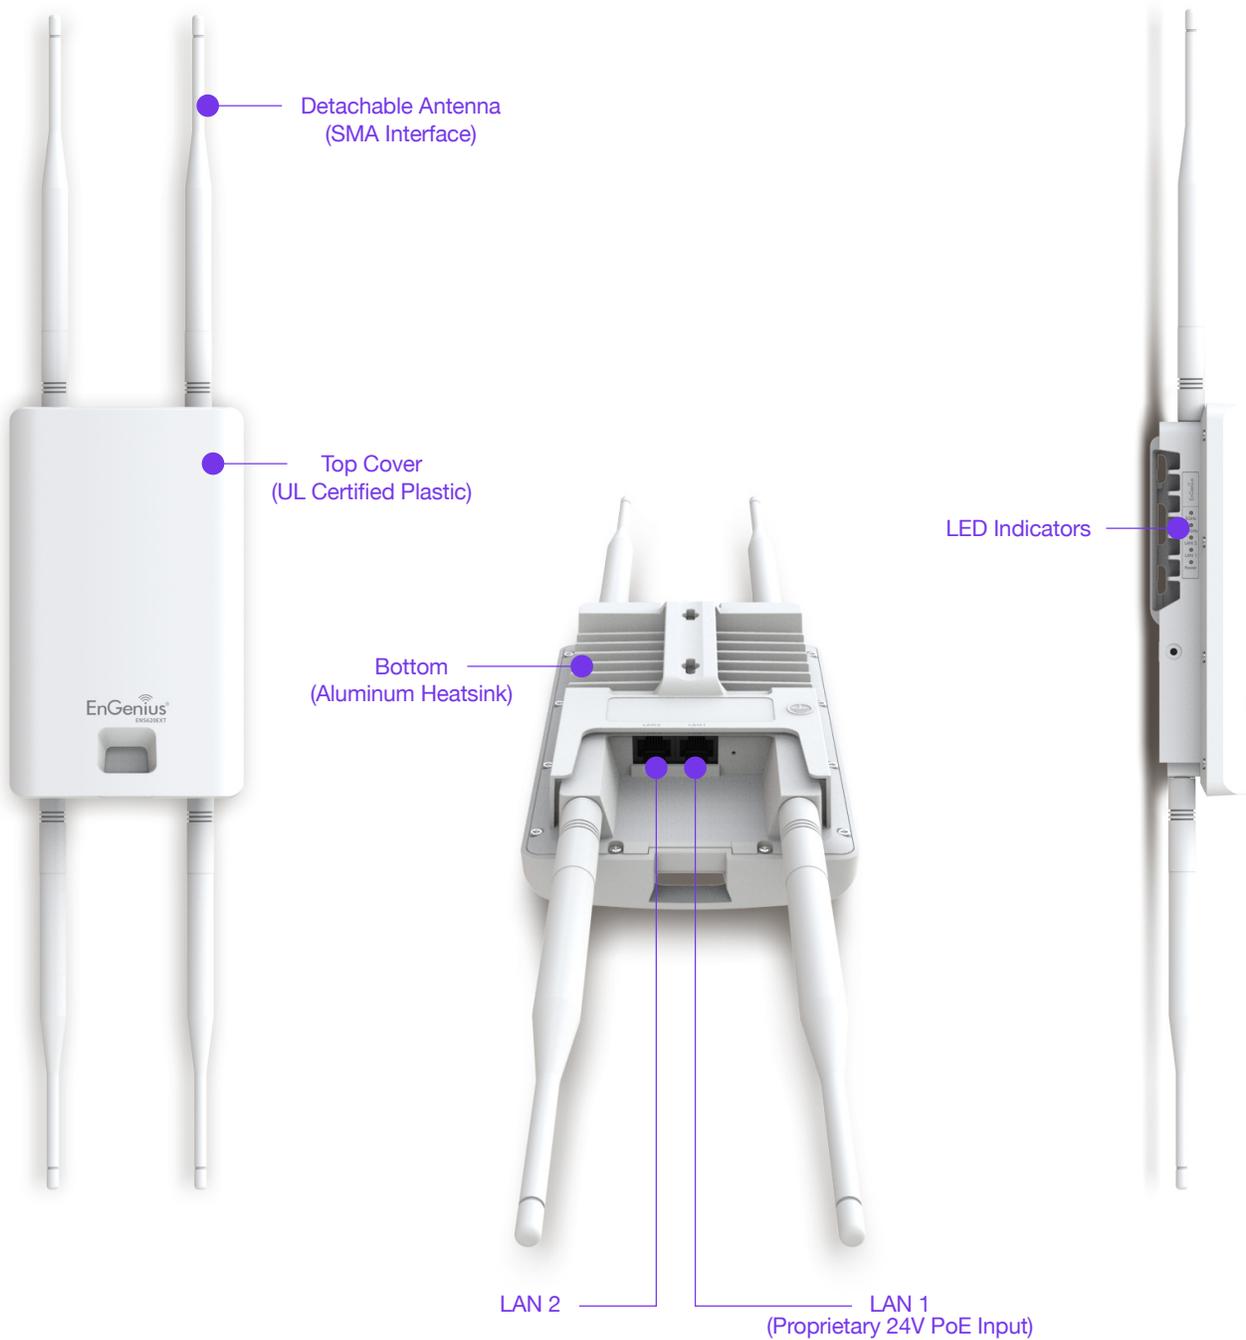

Antenna Radiation Patterns

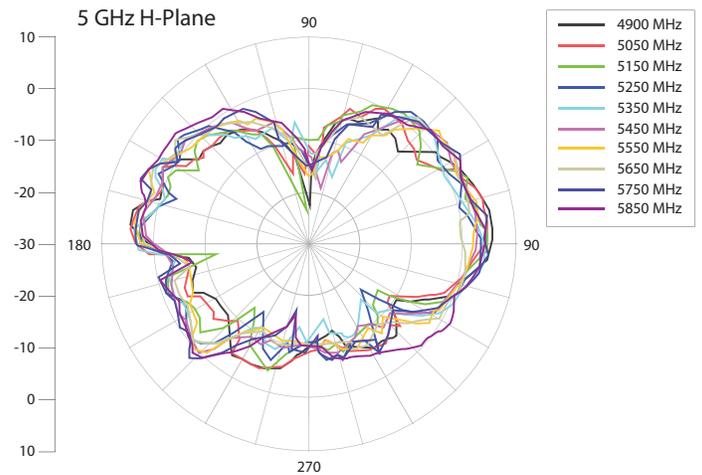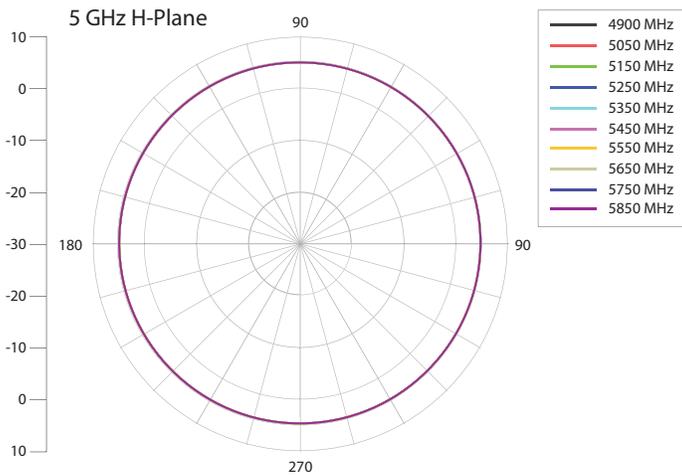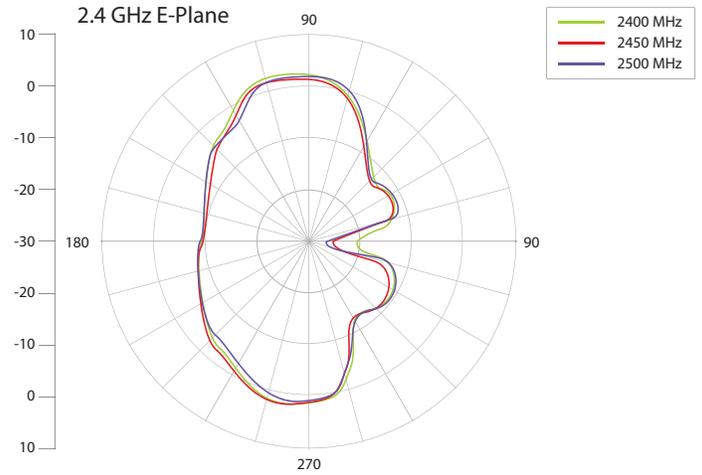

EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626
 Email: partners@engeniustech.com | Phone: 888-735-7888 | Website: engeniustech.com

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2016 EnGenius Technologies, Inc. All rights reserved.
 Version 1.0 - 09/07/16



Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network. Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright © 2016 EnGenius Technologies, Inc. All rights reserved.