

ESN Series

ESN Certified Routers for Emergency Services



Approved for UK Public Safety


Peplink has three routers certified for use in UK's Emergency Services Network (ESN): the HD2 MBX, the HD4 MBX and the BR1 ESN. These routers have been approved for use in the country's fleet of first responder and emergency service vehicles.



Achieve Unbreakable Connectivity

Use our patented SpeedFusion technology to combine ESN and commercial links into an unbreakable VPN connection that stays up even if a link goes down. As traffic goes from one WAN to the next, your session will continue streaming without any interruption. SpeedFusion also has greater coverage and bandwidth than that of a single cellular link.


Videos/DVRs

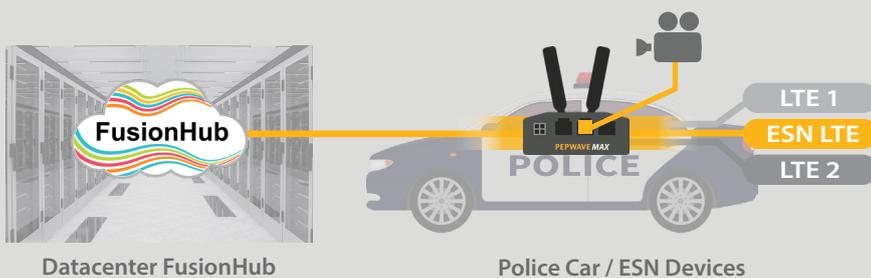

Currently, first responders can only record video on site; live streaming remains a challenge. Use SpeedFusion to bond multiple cellular links into a powerful VPN connection that can stream HD video back to headquarters. WAN Smoothing technology ensures that your video stream remains consistent and uninterrupted even as traffic moves between different WAN links.




Extend 2-Way Radios Anywhere

Previously, 2-way radios such as LMR, P.25, TETRA, NXDN, and DMR only worked with other radios connected to the same repeater. With SpeedFusion, they become a single unbreakable network. This extends the reach of existing 2-way radio networks to anywhere an LTE or other IP network is available.

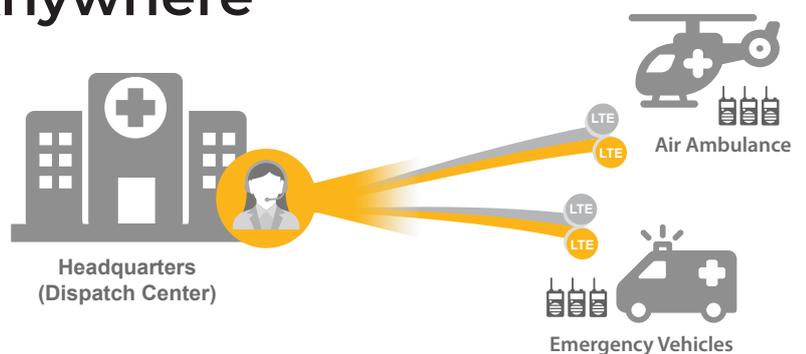

HD2/HD4 MBX

2x RP-SMA Wi-Fi WAN Antenna Connectors 8x GE LAN with 802.3at PoE Output* 2x RP-SMA Wi-Fi AP Antenna Connectors

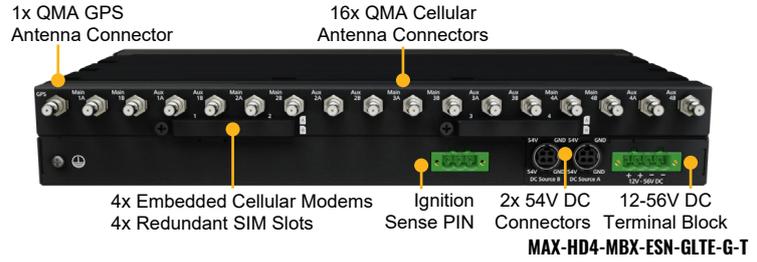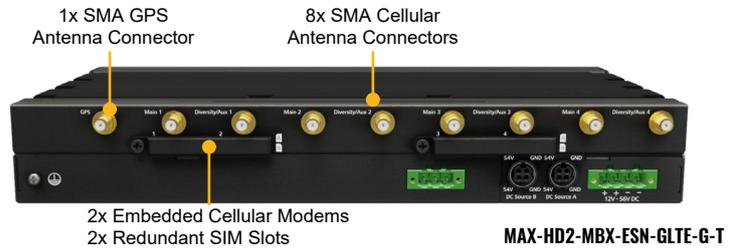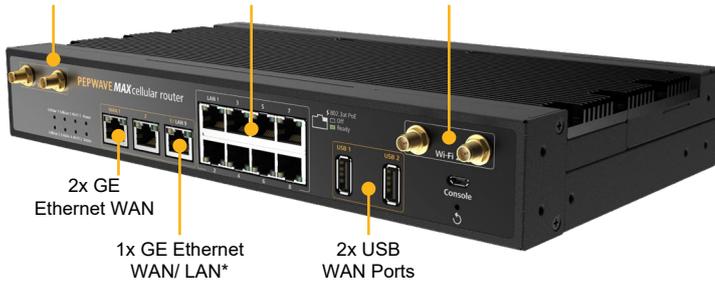

Specifications

WAN Interface	2x USB Interface 3x GE* HD2 MBX: 2x Embedded LTE-A Pro Modems with Redundant SIM Slots HD4 MBX: 4x Embedded LTE-A Pro Modems with Redundant SIM Slots	Dimensions	2.0 x 11.5 x 7.0 inches / 50 x 292 x 177 mm
LAN Interface	9x GE*	Weight	3.3 kg / 7.28 pounds
Wi-Fi Interface	802.11ac/a/b/g/n, 1166 Mbps 2x2 MIMO Wi-Fi WAN and/or AP Simultaneous Dual-Band	Operating Temperature	-40° - 149 °F / -40° - 65°C
Router Throughput	2.5 Gbps	Humidity	15%–95% (non-condensing)
PepVPN Throughput (No Encryption)	600 Mbps	Certifications	FCC, CE, RoHS, E-Mark, PTCRB, Shock and Vibration Resistance: EN 61373:1999 IEC 61373:1999 Railway Applications: EN 50155 Electromagnetic Compatibility: EN 61000 ESN (Emergency Services Network)
PepVPN Throughput (256-bit AES)	500 Mbps	Warranty	1-Year Limited Warranty
LTE Cellular Data Rate (Downlink / Uplink)	1.2 Gbps / 150 Mbps	Package Content MAX HD2 MBX (CAT-18)	MAX HD2 MBX PSU (ACW-630) 4x Dual Band Wi-Fi Antennas (ACW-341) 1x GPS Active Antenna (ACW-232) 8x 2dBi 4G LTE Antennas (ACW-813) 1 Pair of Mounting Brackets (ACW-731) 1x SIM Cover
Recommended Users	50-500	Package Content MAX HD4 MBX (CAT-18)	MAX HD4 MBX PSU (ACW-630) 1x GPS Antenna (ACW-232) 1x QMA to SMA Adaptor 1 Pair of Mounting Brackets (ACW-731) 2x SIM Cover
Antenna Connectors	HD2 MBX: 8x SMA Antenna Connectors + 1x SMA GPS Antenna Connector HD4 MBX: 16x QMA Antenna Connectors + 1x QMA GPS Antenna Connector 4x RP-SMA Wi-Fi Antenna Connectors		
Power Input	DC Jack / Terminal Block: 12-56 V#		
Power Output	Up to Eight 802.3at PoE Outputs#		
Power Consumption	55 W (max.)		

* WAN 3 is configured as a LAN port by default, configuration is changeable on the Web Admin.

2x 54V DC input is needed for all 8x LAN ports to have 802.3at PoE. Plugging in 1x 54V DC input will result in 4x LAN ports having 802.3at PoE

Ordering information

Product Code	Carrier/ Categories	Embedded Modems	LTE Bands	3G Bands
MAX-HD2-MBX-ESN-GLTE-G-T	Global / ESN / CAT-18	2	B1, B3, B25(B2), B66(B4), B26(B5/B18/B19), B7, B8, B12(17), B13, B14, B20, B28, B29, B30, B32, B71, B38, B39, B40, B41, B42, B43, B46, B48	B1, B2, B4, B5(B19), B8
MAX-HD4-MBX-ESN-GLTE-G-T	Global / ESN / CAT-18	4	B1, B3, B25(B2), B66(B4), B26(B5/B18/B19), B7, B8, B12(17), B13, B14, B20, B28, B29, B30, B32, B71, B38, B39, B40, B41, B42, B43, B46, B48	B1, B2, B4, B5(B19), B8

Accessories / Feature Add-on

Product Code	Description
ACW-630	Includes 1x 54V, 3.34A Power Supply Enable 4x LAN with 802.3at PoE output (PoE License automatically applied after kit purchase)
ACW-633	Includes 2x 54V, 3.34A Power Supply Enables 8x LAN with 802.3at PoE output (PoE License automatically applied after kit purchase)
MAX-HD-020-SPF	Supports up to 20 PepVPN / SpeedFusion Peers
SIM-BK8-4E-56V	SIM Injector, 8x SIM cards capacity, 4x 10/100/1000 LAN ports, 56V DC

MAX BR1 ESN



Specifications

Cellular WAN Interfaces	Single LTE Modem	Power Input	Passive PoE Input (WAN Port, 12V – 28V DC) / Power + GPIO
Redundant SIM Slot	Yes	Power Consumption	12W (max.)
SpeedFusion Hot Failover	Yes ^	Dimensions	4.1 x 4.3 x 1.2 inches / 105 x 110 x 30 mm
WAN Interface	1x 10/100M Ethernet Port #	Weight	0.54 pound / 244 grams
LAN Interface	3x 10/100M Ethernet Port # (1x WAN Port shared with LAN Interface) (1x Serial Port shared with LAN Interface)	Operating Temperature	-40° – 149°F / -40° – 65°C
Load Balancing/Failover	Yes	Humidity	15% – 95% (non-condensing)
Stateful Firewall Throughput	100 Mbps	Warranty	1-Year Limited Warranty
Wi-Fi Interface	802.11b/g/n Wi-Fi WAN or AP Simultaneous Dual-Band	Certifications	CE, ROHS, ESN
LTE Cellular Data Rate (Downlink / Uplink)	600 Mbps / 150 Mbps	Package Content	MAX BR1 ESN 12V 2A 4-Pin Power Supply 1x 5dBi Wi-Fi Antenna (2.4G) 1x GPS Antenna 2x 2dBi 4G LTE Antennas (4G LTE)
Recommended Users	60		
Antenna Connectors	2x SMA Antenna Connectors 1x SMA GPS Antenna Connector 1x RP-SMA Wi-Fi Antenna Connector		

^ Failover software license is required to activate SpeedFusion Failover feature and enable Ethernet and Wi-Fi WAN.
2 PepVPN Peers are enabled by default. Can be increased to 5 Peers using license PVN-LC-05.

Ordering information



Product Code	Carrier/ Categories	Embedded Modems	LTE Bands	3G Bands
MAX-BR1-ESN-LTEA-K-T	Global* / ESN / CAT-12	1	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19

* China & HK TD LTE are excluded.

Accessories / Feature Add-on

Product Code	Description
MAX-BR1-ADV	Advanced Feature Package includes a software license key for X.509 Certificate Support (SpeedFusion and IPsec)
PVN-LC-05	PepVPN License Key, enables up to 5 PepVPN peers
MAX-LC-DIM	Activate the Drop-in Mode for the MAX BR1 Series
MAX-BR1-MINI-LC-FS	Failover software license and related feature set for BR1MINI and BR1 ESN, enables Ethernet and Wi-Fi WAN

Transit

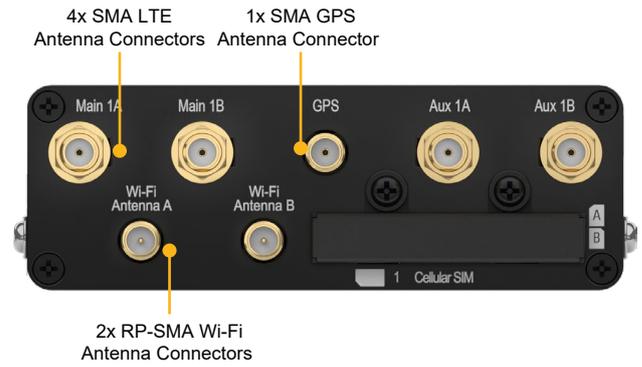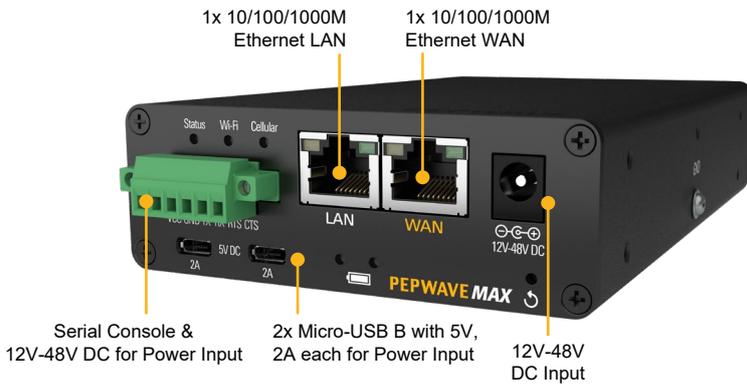

Specifications

Cellular WAN Interface	Single LTE-A Pro Modem	Transmit Power (2.4GHz / 5GHz)	19 dBm / 21 dBm
SpeedFusion Hot Failover	Yes	Antenna Connectors	4x SMA Cellular Connectors 1x SMA GPS Antenna Connector 2x RP-SMA Wi-Fi Antenna Connectors
SpeedFusion WAN Smoothing	No ^	Power Input	Device: 12V – 48V DC AC Adapter: AC Input 100V–240V / DC Output 12V Terminal Block: 12V – 48V DC
SpeedFusion Bandwidth Bonding	No ^	Power Output	Power over Ethernet 802.3at
Number of PepVPN SpeedFusion Peers	2 / 5 #	Power Consumption	7W, 18W (max.)
WAN Interface	1x 10/100/1000M Ethernet +	Dimensions	6.3 x 3.8 x 1.3 inches / 160 x 97 x 33.5 mm
LAN Interface	1x 10/100/1000M Ethernet	Weight	1.3 pounds / 590 grams
USB LAN Port	Micro-USB B	Operating Temperature	-40° – 149°F / -40° – 65°C
Load Balancing/Failover	Yes	Humidity	15% – 95% (non-condensing)
Router Throughput	400 Mbps	Warranty	1-Year Limited Warranty
SpeedFusion Throughput (No Encryption)	100 Mbps	Package Content	1x MAX Transit 12V 2A 4Pin Power Supply (ACW-632) 4x 2dBi 4G LTE Antennas* (ACW-234) 1x GPS Active Antenna (ACW-232) 2x 5dBi Wi-Fi Antennas (ACW-341) 1 Pair of Mounting Brackets (ACW-724)
SpeedFusion Throughput (256-bit AES)	60 Mbps		
Recommended Users	150		
LTE Cellular Data Rate (Downlink / Uplink)	1.2 Gbps / 150 Mbps		
Wi-Fi Interface	AP Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 5, 2X2 MIMO		

^ Requires PrimeCare Subscription, complementary for the first year.

2 PepVPN Peers are enabled by default. 5 PepVPN Peers are enabled for PrimeCare models which requires PrimeCare Subscription, complementary for the first year.

+ The WAN port can act as a LAN port if needed.

Ordering information

Product Code	Embedded Modems	Carrier/ Categories	LTE Bands	3G Bands
MAX-TST-ESN-GLTE-G-T-PRM	1	Global / ESN / CAT-18	B1, B3, B25(B2), B66(B4), B26(B5/B18/B19), B7, B8, B12(17), B13, B14, B20, B28, B29, B30, B32, B71, B38, B39, B40, B41, B42, B43, B46, B48	B1, B2, B4, B5(B19), B8

Accessories / Feature Add-on

Product Code	Description
ACW-DIN-TST	DIN Rail Mount