

D-Link®



N300



Easy Setup



Smart Signal Indicator



Fast Ethernet



DAP-1330

N300 Wi-Fi Range Extender

Features

Connectivity

- Smart Signal Indicator to help find the best location for optimal coverage
- Wi-Fi speeds of up to 300 Mbps¹
- Wireless 802.11g/b backward compatibility
- Wi-Fi speeds of up to 300 Mbps¹
- 10/100 Fast Ethernet Port

Security

- WPA2/WPA wireless encryption to keep your wireless connection secure
- Wi-Fi Protected Setup (WPS) for secure setup with the simple press of a button

Easy to Use

- One-piece wall plug design is compact, discreet and does not require additional power adapter and cable
- Built-in setup wizard and QRS Mobile app for mobile devices guide you through an easy setup

Overview

The DAP-1330 N300 Wi-Fi Range Extender will extend the coverage of your home's existing wireless network and eliminate dead zones. With a compact design and wireless speeds of up to 300Mbps, the DAP-1330 will let you enjoy a fast wireless connection.


Extend your home wireless coverage

Increase the coverage of your home Wi-Fi network with the sleek and easy-to-use N300 Wi-Fi Range Extender. Wireless N300 technology ensures fast connection speeds whilst providing backward compatibility with older wireless devices in your network, allowing you to enjoy a reliable wireless connection. In addition, there's a built-in Ethernet port to connect wired devices such as your laptop, computers, smart TVs and games consoles with an Ethernet port.

Smart Signal Indicator


Don't worry about dead spots and not knowing the best signal strength for the best coverage. The Smart Signal Indicator will help you find the best location for optimal coverage throughout your home so you can enjoy more of what you like most in life.

N300 Wi-Fi Extender

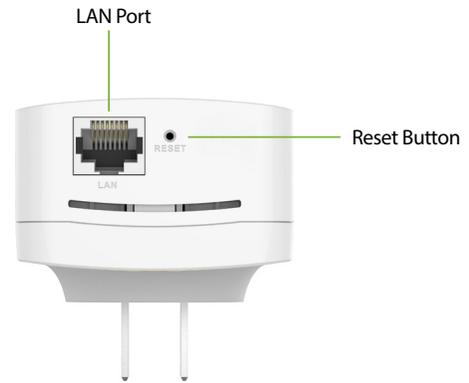


How to Extend Your Wi-Fi Network

Extend Your Wireless Network using Wi-Fi

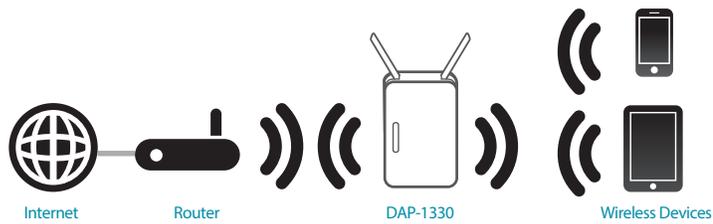

Add Wireless to your Wired Ethernet Network

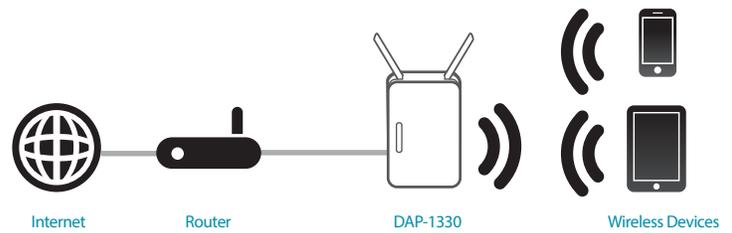

Technical Specifications

General

Device Interfaces	<ul style="list-style-type: none"> • 802.11 n/g wireless LAN • 10/100 Fast Ethernet Port 	<ul style="list-style-type: none"> • Reset Button • WPS Button
LEDs	<ul style="list-style-type: none"> • Status/WPS 	<ul style="list-style-type: none"> • 3 Segment Wi-Fi Signal Strength Indicator
Standards	<ul style="list-style-type: none"> • IEEE 802.11n • IEEE 802.11g 	<ul style="list-style-type: none"> • IEEE 802.3u • IEEE 802.11b
Antennas	<ul style="list-style-type: none"> • Two external antennas 	
Minimum System Requirements	<ul style="list-style-type: none"> • Windows® 10, Windows® 8.1, Windows® 8, Windows® 7 , or Mac OS® X (v10.7) • Internet Explorer® 11, Mozilla® Firefox® v28, Google Chrome v33, or Safari v7 	

Functionality

Wireless Security	<ul style="list-style-type: none"> • Wi-Fi Protected Access (WPA/WPA2) 	<ul style="list-style-type: none"> • WPS (PBC)
Advanced Features	<ul style="list-style-type: none"> • D-Link One-Touch Extender Setup 	
Device Management	<ul style="list-style-type: none"> • Supports QRS Mobile app for iPhone, iPad, iPod touch, and Android mobile devices 	<ul style="list-style-type: none"> • Web UI

Technical Specifications Continued	
Physical	
Dimensions	• 3.03 x 2.28 x 1.33 inches
Weight	• 3.07 oz
Power	• Input: 100 to 240 V AC, 50/60 Hz
Temperature	• Operating: 32 to 104 °F • Storage: -4 to 149 °F
Humidity	• Operating: 10% to 90% non-condensing • Storage: 5% to 95% non-condensing
Certifications	• FCC • Wi-Fi Certified • IC • UL
Package Contents	
What's Inside	• N300 Wi-Fi Range Extender • Quick Installation Guide • Wi-Fi Configuration Card
Warranty	
Warranty	• 1-Year Limited Warranty ²
Order Information	
<i>Part Number</i>	<i>Description</i>
DAP-1330	• N300 Wi-Fi Range Extender

¹ Maximum wireless signal rate derived from IEEE Standard 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead may lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

² 1-Year Limited Warranty available only in the USA at <http://support.dlink.com/warranty>

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2015 D-Link Corporation. All rights reserved.

Updated September 22, 2015

