



Solving the WLAN Problems of Tomorrow, Today

- Ceiling and wall mountable
- Plenum rated housing
- 2-in-1 standalone/managed AP design
- CAPWAP management supported
- 2.4 GHz and 5 GHz concurrent dual-band (NWA5123-NI)
- High-performance RF technology: Tx Beamforming and Rx Maximum Likelihood Demodulation (MLD)

The ZyXEL NWA5120 Series 802.11 a/b/g/n Unified Access Point is a highly future-proof WLAN solution perfect for growing business, hospitality and education environments. With a 2-in-1 standalone/managed AP design, users can initially use it as a standalone AP, and convert it to a controller-managed AP when Wi-Fi demand grows. The Series is designed with industry-leading technology to provide trouble-free wireless quality to lower IT overhead. The embedded antennas and signal output are fine-tuned to provide easy RF planning and maximum signal coverage. It also supports such features as dynamic channel selection, load balancing and pre-authentication for superb Wi-Fi experience.

Benefits

Ceiling-mount design blends into environments

Different from traditional business routers, the slick “smoke detector” ceiling-mount design of ZyXEL NWA5120 Series provides better coverage and performance. The NWA5120 Series is a PoE AP with a multifunction design that solves all problems by offering internal as well as external antennas to enhance wireless performance and to eliminate coverage dead spots. Moreover, the signal outputs have been fine-tuned to provide easy RF planning and excellent signal coverage especially for hospitality and education environments.

The ZyXEL NWA5120 Series has been designed with plenum rating and made of non-toxic materials without hazardous emission – the safe design makes it more suitable for public indoor wireless deployments.

Effortless conversion from standalone to centrally-managed

The ZyXEL NWA5120 Series Unified APs can be configured as a fully functional standalone AP and also capable to work with Wireless LAN Controller to form a robust controller-based WLAN solution with centralized management when Wi-Fi demand grows, as well as auto AP provisioning over both LAN and WAN connections. After being installed and powered on, the APs automatically look for the Wireless LAN Controller and establish connections. Utilizing the CAPWAP protocol, connections can be established between the controller and APs without needing to change the existing LAN infrastructure.



NWA5120 Series
802.11 a/b/g/n Unified
Access Point




Easy to RF planning with the same 2.4 GHz and 5 GHz signal coverage (NWA5123-NI)

As more and more mobile or laptop devices support both 2.4 GHz and 5 GHz bands, users can choose 5 GHz as the first priority for default searching and balance heavy network loading with the 2.4 GHz band, besides, to have always on and stable connection become one of the essential elements of Wi-Fi network. The ZyXEL NWA5123-NI 802.11 a/b/g/n Dual-Radio Unified AP consists of 2.4 GHz and 5 GHz dual-band radio to match the concurrent Wi-Fi services with either frequency. The higher frequency of the 5 GHz band provides a shorter signal range compared to the 2.4 GHz band with the same transmit output power. The NWA5123-NI consist of high 5 GHz transmit output power can boost the 5 GHz signal range, providing signal coverage equal to the 2.4 GHz wireless network. Therefore, the complexity of deployment can be considerably reduced.

Continuous wireless services for better reliability and network quality

The ZyXEL NWA5120 Series 802.11n PoE AP features coverage-enhancing 11n technologies such as TX Beamforming, LDPC and MLD to eliminate issues of dead spots and inefficient coverage. With MLD, the NWA5120 Series boosts the Signal-to-Noise Ratio (SNR) to 3 dB for more stable wireless services and better performance. Meanwhile, TX Beamforming also eliminates dead spots by expanding the coverage with continuous, dynamic changing of signal phases. With non-stop wireless services, the NWA5120 Series provides reliable network connectivity for better business productivity.

Application Diagram

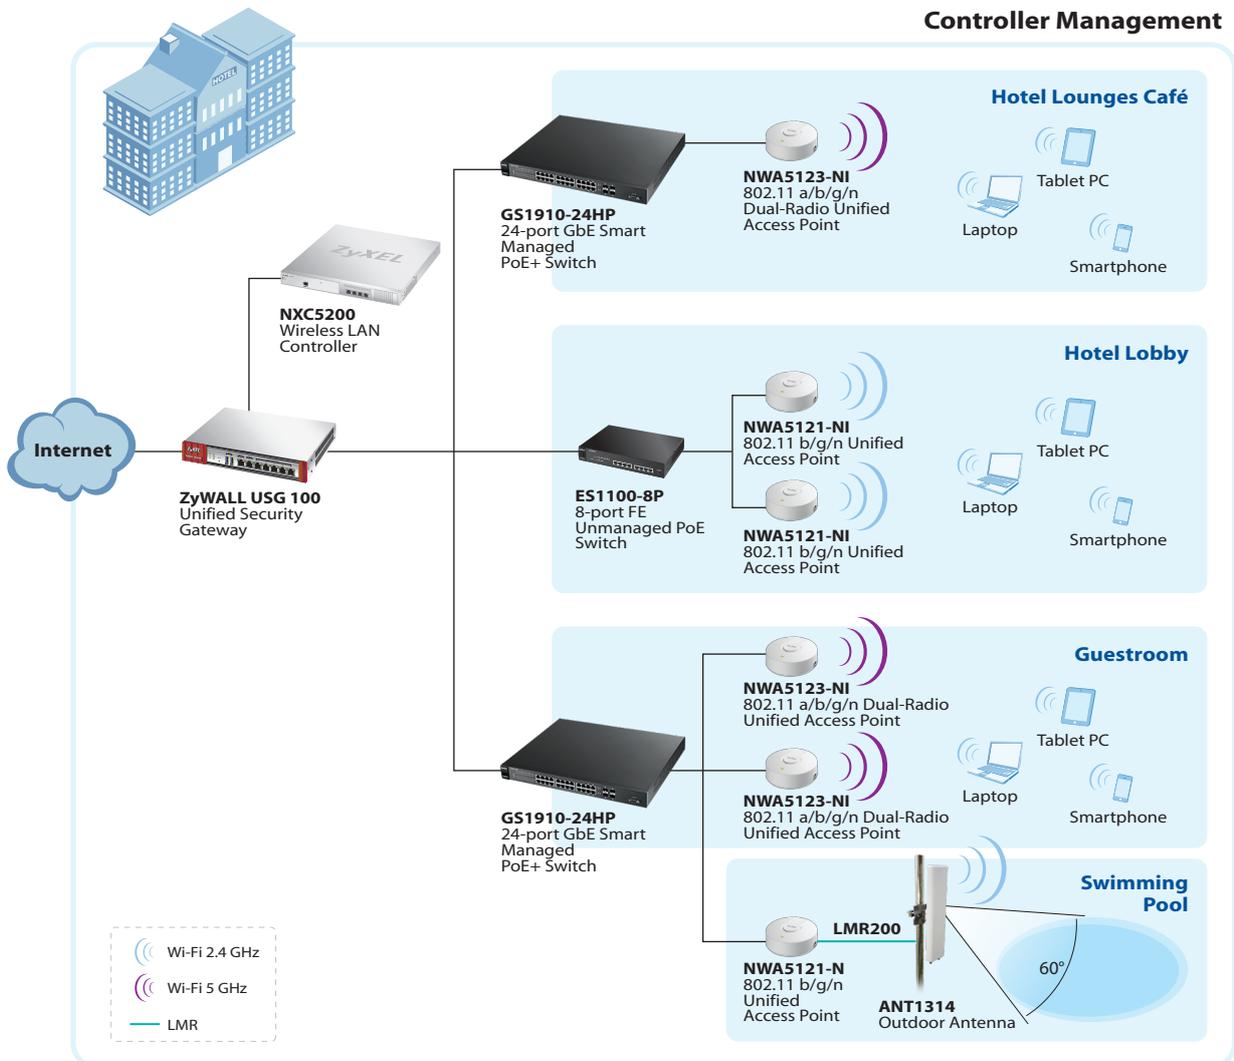

Specifications

Model	NWA5121-NI	NWA5121-N	NWA5123-NI	
Product name	802.11 b/g/n Unified Access Point 	802.11 b/g/n Unified Access Point 	802.11 a/b/g/n Dual-Radio Unified Access Point 	
Main Design				
Wireless frequency	2.4 GHz	2.4 GHz	2.4 GHz & 5 GHz	
Radio	1	1	2	
Antenna	Embedded 2x2 4.5 dBi antenna	2 External 3 dBi dipole antenna	Embedded 2x2 3 dBi/2 dBi antenna	
RF Specifications				
Frequency band	2.4 GHz (11 g/n)	2.4 GHz (IEEE 802.11 b/g/n) USA (FCC): 2.412 to 2.462 GHz Europe (ETSI): 2.412 to 2.472 GHz Taiwan (TW): 2.412 to 2.462 GHz	2.4 GHz (IEEE 802.11 b/g/n) USA (FCC): 2.412 to 2.462 GHz Europe (ETSI): 2.412 to 2.472 GHz Taiwan (TW): 2.412 to 2.462 GHz	
	5 GHz (11 a/n)	-	5 GHz (IEEE 802.11 a/n) USA (FCC): 5.15 to 5.35 GHz; 5.725 to 5.850 GHz Europe (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz Taiwan (TW): 5.15 to 5.35 GHz; 5.725 to 5.850 GHz	
Typical Transmit Output Power (Conducted)				
FCC	11 b/g	20 dBm	20 dBm	23 dBm
	11 g/n	20 dBm	20 dBm	23 dBm
	11 a	-	-	26 dBm
	11 a/n	-	-	26 dBm
EU	11 b/g	17 dBm	17 dBm	17 dBm
	11 g/n	17 dBm	17 dBm	17 dBm
	11 a	-	-	26 dBm
	11 a/n	-	-	26 dBm
LAN				
Number of 10/100/1000 Mbps LAN ports	1	1	1	
PoE	Yes	Yes	Yes	
PoE power draw	4 W	4 W	7 W	
WLAN Features				
Support data rate	802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps 802.11n: up to 300 Mbps in MCS15 (40 MHz; GI=400 ns)	802.11g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps 802.11n: up to 300 Mbps in MCS15 (40 MHz; GI=400 ns)	802.11 a/g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48 and 54 Mbps 802.11n: up to 300 Mbps in MCS15 (40 MHz; GI=400 ns)	
WMM (Wi-Fi certified)	Yes	Yes	Yes	
WEP	Yes	Yes	Yes	
WPA/WPA2-PSK	Yes	Yes	Yes	
WPA2 (Wi-Fi certified)	Yes	Yes	Yes	
WPA/WPA2-Enterprise	Yes	Yes	Yes	
Network				
VLANs	Yes	Yes	Yes	
DHCP client	Yes	Yes	Yes	
QoS				
WMM	Yes	Yes	Yes	
WMM power saving	Yes	Yes	Yes	
Management Features				
CLI	Yes	Yes	Yes	
Others				
Plenum rating	Yes	Yes	Yes	
MTBF (hr)	627,152	627,152	781,396	

Model	NWA5121-NI	NWA5121-N	NWA5123-NI	
Standard Compliance				
Ethernet	IEEE 802.3, IEEE 802.3u	IEEE 802.3, IEEE 802.3u	IEEE 802.3, IEEE 802.3u	
PoE	IEEE 802.3af	IEEE 802.3af	IEEE 802.3af	
Radio modulation	IEEE 802.11 a/g (OFDM/DSSS) <ul style="list-style-type: none"> • 48/54 Mbps (QAM-64) • 24/36 Mbps (QAM-16) • 12/18 Mbps (QPSK) • 6/9 Mbps (BPSK) 	IEEE 802.11b (DSSS) <ul style="list-style-type: none"> • 5.5/11 Mbps (CCK) • 2 Mbps (DQPSK) • 1 Mbps (DBPSK) 	IEEE 802.11n (OFDM/DSSS) <ul style="list-style-type: none"> • QAM-64 • QAM-16 • QPSK • BPSK 	
Certification				
Radio	ETSI EN 300 328 V1.7.1: 11-2006 FCC Part 15.247 LP0002 EN 60601-1-2: 2007		ETSI EN 300 328 V1.7.1: 11-2006 EN 301 893 V1.5.1 FCC Part 15.247 FCC Part 15E LP0002 EN 60601-1-2: 2007	
EMC	EN 301 489-1 V1.8.1: 04-2008 EN 301 489-17 V2.1.1: 05-2009 EN55022: 2010 EN55024: 2010 EN61000-3-2/-3 FCC Part 15.107 BSMI CNS13438.99; CNS14336: 99		EN 301 489-1 V1.8.1: 11-2008 EN 301 489-17 V2.1.1: 05-2009 EN55022: 2010 EN55024: 2010 EN61000-3-2/-3 FCC Part 15.107 BSMI CNS13438.99; CNS14336: 99	
Safety	EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 IEC 60950-1: 2005 BSMI		EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 IEC 60950-1: 2005 BSMI	
Power Requirement				
Power supply	12 V DC, 1 A	12 V DC, 1 A	12 V DC, 1 A	
Physical Specifications				
Item	Dimensions (WxDxH)(mm/in.)	130 x 130 x 54.5/ 5.12 x 5.12 x 2.17	130 x 130 x 54.5/ 5.12 x 5.12 x 2.17	130 x 130 x 54.5/ 5.12 x 5.12 x 2.17
	Weight (kg/lb.)	0.23/0.51	0.23/0.51	0.25/0.55
Packing	Dimensions (WxDxH)(mm/in.)	282 x 207 x 71/ 11.10 x 8.15 x 2.80	282 x 207 x 71/ 11.10 x 8.15 x 2.80	282 x 207 x 71/ 11.10 x 8.15 x 2.80
	Weight (kg/lb.)	0.61/1.34	0.61/1.34	0.63/1.39
Environmental Specifications				
Operating environment	Temperature	0°C to 50°C/32°F to 122°F	0°C to 50°C/32°F to 122°F	0°C to 50°C/32°F to 122°F
	Humidity	10% to 90% (non-condensing)	10% to 90% (non-condensing)	10% to 90% (non-condensing)
Storage environment	Temperature	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F	-30°C to 70°C/-22°F to 158°F
	Humidity	10% to 90%	10% to 90%	10% to 90%

For more product information, visit us on the web at www.ZyXEL.com



Copyright © 2013 ZyXEL Communications Corp. All rights reserved. ZyXEL, ZyXEL logo are registered trademarks of ZyXEL Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

